

**REMARKS**

Claims 1-22 are all the claims pending in the application. Claims 3 and 7 have been amended to resolve issues raised by the Examiner.

Entry of the above amendments is respectfully requested.

On page 2 of the Office Action, the Examiner indicates that Applicants must submit an English language translation of provisional application 60/245,717 to get the benefit of the priority date.

The English translation of the provisional application was filed with the nonprovisional application, as can be seen from the copy of the application transmittal letter dated July 10, 2001, submitted herewith. However, to expedite this matter, Applicants submit herewith an English language translation of provisional application 60/245,717, and respectfully request that the Examiner acknowledge Applicants' claim to domestic priority.

In addition, Applicants submit herewith a Declaration under 37 C.F.R. § 1.132 reciting the correct application number and the correct year to remove Takeuchi as a reference, as discussed below.

**I. Rejection of Claims Under 35 U.S.C. § 112, Second Paragraph**

On page 3 of the Office Action, claims 3-5, 7-12, 14, 16 are rejected under 35 U.S.C. 112, second paragraph. The Examiner contends that these claims improperly depend, directly or indirectly, from claim 1.

With respect to claim 3, Applicants have amended claim 3 to more clearly depend from claim 1 or 2 and to further define the polymer compound of claim 1 and 2. With respect to claim 7, Applicants have re-written claim 7 in independent form.

In view of the above, Applicants respectfully request that the rejection be withdrawn.

With respect to the Examiner's position that a new restriction requirement may be forthcoming, Applicants respectfully submit that since the Examiner has been examining all of the elected claims (including claims reciting a solid polymer electrolyte comprising a polymer and claims reciting a polymerizable composition), it appears that it would not be seriously burdensome for the Examiner to continue to do so. *See* MPEP §803. That is, the Examiner has already been examining polymer compounds having specific repeating units, and such search would most likely include precursors of the polymers, as well. Accordingly, Applicants respectfully request that the examine claims 1-18 together.

**II. Rejection of Claims Under 35 U.S.C. § 102(b)**

On page 4 of the Office Action, claims 1-2 and 6-18 are rejected under 35 U.S.C. 102(b) as being anticipated by Takeuchi et al. (JP 2000-67643).

Applicants respectfully respond as follows.

As noted in the previous response, Takeuchi was published on March 3, 2000, which is not more than one year before the effective filing date of November 6, 2000, for the present application (the filing date of the provisional application no. 60/245,717, which supports the claims of this application). Therefore, Takeuchi could only possibly be a reference under 35 U.S.C. § 102(a).

In addition, Takeuchi is assigned to Showa Denko K.K., and Masataka Takeuchi, Shuichi Naijo<sup>1</sup> and Ayako Nishioka are common inventors. Therefore, Applicants submit herewith a

---

<sup>1</sup> There is a translation error with respect to Shuichi Naijo's name in the Examiner's English abstract.

Declaration under 37 C.F.R. § 1.132 showing that the inventive entity of the disclosure being relied upon by the Examiner is the same inventive entity as in the present case. Accordingly, Takeuchi is not invented "by another" as set forth in 35 U.S.C. § 102(a), and therefore does not qualify as a reference under §102(a).


In view of the above, withdrawal of the foregoing rejection is respectfully requested.

**III. Conclusion**

In view of the above, reconsideration and allowance of this application are now believed to be in order, and such actions are hereby solicited. If any points remain in issue which the Examiner feels may be best resolved through a personal or telephone interview, the Examiner is kindly requested to contact the undersigned at the telephone number listed below.

The USPTO is directed and authorized to charge all required fees, except for the Issue Fee and the Publication Fee, to Deposit Account No. 19-4880. Please also credit any overpayments to said Deposit Account.

Respectfully submitted,



Keiko K. Takagi  
Registration No. 47,121

SUGHRUE MION, PLLC  
Telephone: (202) 293-7060  
Facsimile: (202) 293-7860

WASHINGTON OFFICE

**23373**

CUSTOMER NUMBER

Date: February 24, 2004



MAR 02 2004

**PATENT APPLICATION**

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re application of

Docket No: Q61612

Masataka TAKEUCHI, et al.

Appln. No.: 09/901,122

Group Art Unit: 1745

Confirmation No.: 7232

Examiner: Laura S. Weiner

Filed: July 10, 2001

For: POLYMERIZABLE COMPOSITION AND USE THEREOF

**DECLARATION UNDER 37 C.F.R. § 1.132**

Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

Sir:

We, Masataka Takeuchi, Shuichi Naijo and Ayako Nishioka, hereby declare and state:

THAT we are the inventors named on the above-identified application;

THAT we are also the inventors named on JPA 2000-067643, which was filed on August 19, 1998;

THAT the second name listed on JPA 2000-067643 has been incorrectly translated as "Shiyuuichi Uchijiyou", and should be "Shuichi Naijo"; and

THAT the inventive entity of the above-application and JPA 2000-067643 are the same.

I declare further that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the

**DECLARATION UNDER 37 C.F.R. § 1.132**  
**U.S. Application No.: 09/901,122**

**Attorney Docket No.: Q61612**

United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Date: February 6, 2004

Masataka Takeuchi  
Masataka Takeuchi

Date: February 6, 2004

Shuichi Naijo  
Shuichi Naijo

Date: February 6, 2004

Ayako Nishioka  
Ayako Nishioka




MAR 02 2004

## DECLARATION

I, Atsuko Ikeda, residing at 26-2-906, Ojima 3-chome, Koto-ku, Tokyo, Japan, do hereby certify that I am conversant with the English and Japanese languages and am a competent translator thereof. I further certify that to the best of my knowledge and belief the attached English translation is a true and correct translation made by me of U.S. Provisional Patent Application No. 60/245,717 filed on November 6, 2000.

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Signed this 16th day of May, 2001

  
Atsuko Ikeda

[NAME OF DOCUMENT] Specification


[TITLE OF THE INVENTION]

Polymerizable Composition and Use Thereof

[SCOPE OF CLAIM FOR PATENT]

[Claim 1] A solid polymer electrolyte comprising a polymer compound having a branched carbonate structure represented by formula (1) as a partial structure and at least one electrolyte salt:

[Chem. 1]

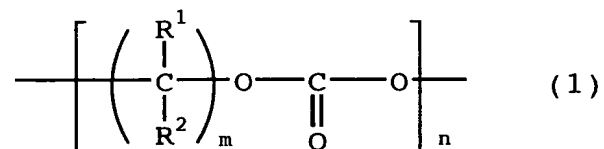


(wherein R<sup>1</sup> and R<sup>2</sup> each represents a hydrogen atom, an alkyl group having from 1 to 10 carbon atoms, an alkoxy group having from 1 to 10 carbon atoms or an alkoxyalkyl group having from 1 to 10 carbon atoms, the alkyl, alkoxy or alkoxyalkyl group may have a linear, branched or cyclic structure, m represents an integer of 3 to 10, n represents an integer of 1 to 500, and R<sup>1</sup>, R<sup>2</sup>, m or n present in plurality within the same molecule may be the same or different, provided that R<sup>1</sup> or R<sup>2</sup> present in plurality within the same molecule are not a hydrogen atom at the same time).

[Claim 2] A solid polymer electrolyte comprising a polymer compound having a branched carbonate structure

represented by formula (2) as a partial structure and at least one electrolyte salt:


[Chem. 2]

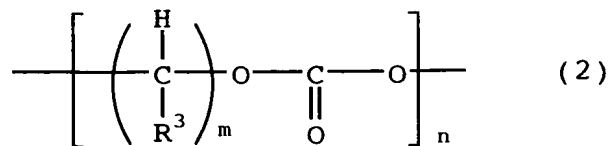


(wherein  $\text{R}^3$  represents a hydrogen atom, an alkyl group having from 1 to 10 carbon atoms, an alkoxy group having from 1 to 10 carbon atoms or an alkoxyalkyl group having from 1 to 10 carbon atoms, the alkyl, alkoxy or alkoxyalkyl group may have a linear, branched or cyclic structure,  $m$  represents an integer of 3 to 10,  $n$  represents an integer of 1 to 500, and  $\text{R}^3$ ,  $m$  or  $n$  present in plurality within the same molecule may be the same or different, provided that  $\text{R}^3$  present in plurality within the same molecule are not a hydrogen atom at the same time).

[Claim 3] A solid polymer electrolyte which is a polymer of a polymerizable compound having a branched carbonate structure described in claim 1 or 2 and a polymerizable functional group represented by the following formula (3) and/or (4):

[Chem. 3]

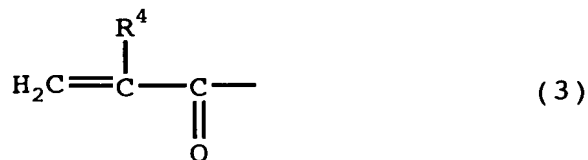



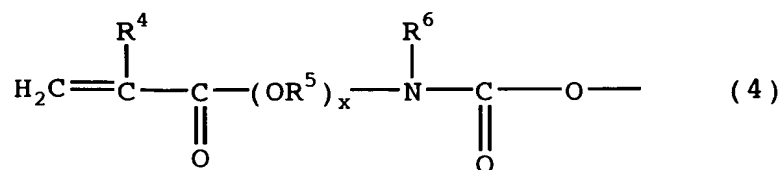

(wherein R<sup>4</sup> represents a hydrogen atom or an alkyl group having from 1 to 10 carbon atoms, R<sup>6</sup> represents a hydrogen atom, an alkyl group having from 1 to 10 carbon atoms, an alkoxy group having from 1 to 10 carbon atoms or an alkoxyalkyl group having from 1 to 10 carbon atoms, the alkyl, alkoxy or alkoxyalkyl group may have a linear, branched or cyclic structure, R<sup>5</sup> represents a divalent group which may contain a heteroatom and may have a linear, branched or cyclic structure, and x represents 0 or 1, provided that R<sup>4</sup>, R<sup>5</sup>, R<sup>6</sup> or x present in plurality within the same molecule may be the same or different).

[Claim 4] The solid polymer electrolyte as claimed in claim 3, wherein the polymerizable compound has a weight average molecular weight of 100 to 3,000.

[Claim 5] The solid polymer electrolyte as claimed in claim 3 or 4, wherein the polymerizable compound is liquid at room temperature and the viscosity thereof is 5,000 mPa·S (25°C) or less.

[Claim 6] The solid polymer electrolyte as claimed in any one of claims 1 to 5, which comprises at least one organic solvent.

[Claim 7] A polymerizable composition for solid

polymer electrolytes, comprising at least one polymerizable compound claimed in any one of claims 3, 4 and 5 and at least one electrolyte salt.

[Claim 8] The polymerizable composition for solid polymer electrolytes as claimed in claim 7, which comprises at least one organic solvent.

[Claim 9] The polymerizable composition for solid polymer electrolytes as claimed in claim 8, wherein the viscosity is 6.0 mPa·S (25°C) or less.

[Claim 10] A solid polymer electrolyte obtained by polymerizing the polymerizable composition claimed in claim 7.

[Claim 11] A solid polymer electrolyte obtained by polymerizing the polymerizable composition claimed in claim 8.

[Claim 12] A solid polymer electrolyte obtained by polymerizing the polymerizable composition claimed in claim 9.

[Claim 13] The solid polymer electrolyte as claimed in any one of claims 1, 2, 10, 11 and 12, wherein the electrolyte salt is at least one electrolyte salt selected from an alkali metal salt, a quaternary ammonium salt and a quaternary phosphonium salt.

[Claim 14] The polymerizable composition for a solid polymer electrolyte as claimed in any one of claims 7, 8

and 9, wherein the electrolyte salt is at least one electrolyte salt selected from an alkali metal salt, a quaternary ammonium salt and a quaternary phosphonium salt.

[Claim 15] The solid polymer electrolyte as claimed in any one of claims 6, 11 and 12, wherein the organic solvent is at least one organic solvent selected from carbonates, aliphatic esters, ethers, lactones, sulfoxides and amides.

[Claim 16] The polymerizable composition for solid polymer electrolytes as claimed in claim 8 or 9, wherein the organic solvent is at least one organic solvent selected from carbonates, aliphatic esters, ethers, lactones, sulfoxides and amides.

[Claim 17] A battery using a solid polymer electrolyte claimed in any one of claims 1 to 6, 10 to 13 and 15.

[Claim 18] The battery as claimed in claim 17, which is a lithium primary or lithium secondary battery using, as the electrolyte salt, at least one member selected  $\text{LiPF}_6$ ,  $\text{LiBF}_4$ ,  $\text{LiAsF}_6$  and  $\text{LiN}(\text{A-SO}_2)_2$  (wherein A represents a perfluoroalkyl group having from 1 to 10 carbon atoms).


[Claim 19] An electric double-layer capacitor using a solid polymer electrolyte claimed in any one of claims 1 to 6, 10 to 13 and 15.

[Claim 20] An electrochromic device using a solid

polymer electrolyte claimed in any one of claims 1 to 6, 10 to 13 and 15.

[Claim 21] A polymerizable compound represented by formula (5):


[Chem. 4]

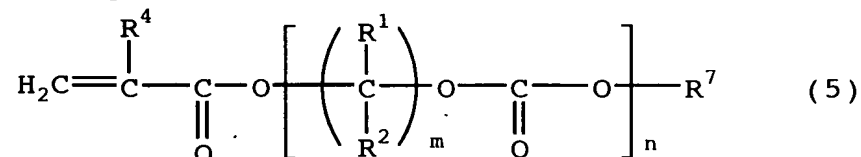

(wherein R<sup>1</sup> and R<sup>2</sup> each represents a hydrogen atom, an alkyl group having from 1 to 10 carbon atoms, an alkoxy group having from 1 to 10 carbon atoms or an alkoxyalkyl group having from 1 to 10 carbon atoms, the alkyl, alkoxy or alkoxyalkyl group may have a linear, branched or cyclic structure, m represents an integer of 3 to 10, n represents an integer of 1 to 500, R<sup>4</sup> represents hydrogen or an alkyl group having from 1 to 10 carbon atoms, the alkyl group may have a linear, branched or cyclic structure, R<sup>7</sup> represents a chained, branched and/or cyclic organic group having from 1 to 30 carbon atoms, which may contain a heteroatom and/or an unsaturated bond, and R<sup>1</sup>, R<sup>2</sup>, R<sup>4</sup>, R<sup>7</sup>, m or n present in plurality within the same molecule may be the same or different, provided that R<sup>1</sup> or R<sup>2</sup> present in plurality within the same molecule are not a hydrogen atom at the same time).

[Claim 22] A polymerizable compound represented by

formula (6):

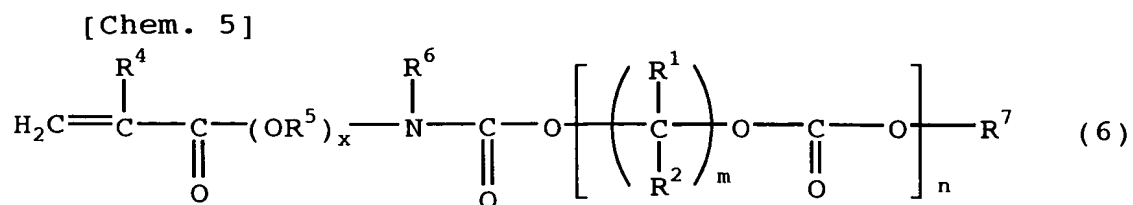

(wherein  $\text{R}^1$  and  $\text{R}^2$  each represents a hydrogen atom, an alkyl group having from 1 to 10 carbon atoms, an alkoxy group having from 1 to 10 carbon atoms or an alkoxyalkyl group having from 1 to 10 carbon atoms, the alkyl, alkoxy or alkoxyalkyl group may have a linear, branched or cyclic structure,  $m$  represents an integer of 3 to 10,  $n$  represents an integer of 1 to 500,  $x$  represents 0 or 1,  $\text{R}^4$  represents a hydrogen atom or an alkyl group having from 1 to 10 carbon atoms, the alkyl group may have a linear, branched or cyclic structure,  $\text{R}^7$  represents a chained, branched and/or cyclic organic group having from 1 to 30 carbon atoms, which may contain a heteroatom and/or an unsaturated bond,  $\text{R}^6$  represents a hydrogen atom, an alkyl group having from 1 to 10 carbon atoms, an alkoxy group having from 1 to 10 carbon atoms or an alkoxyalkyl group having from 1 to 10 carbon atoms, the alkyl, alkoxy or alkoxyalkyl group may have a linear, branched or cyclic structure,  $\text{R}^7$  represents a chained, branched and/or cyclic organic group having from 1 to 30 carbon atoms, which may contain a heteroatom and/or an unsaturated bond, and  $\text{R}^1$ ,  $\text{R}^2$ ,  $\text{R}^4$ ,  $\text{R}^5$ ,  $\text{R}^6$ ,  $\text{R}^7$ ,  $m$  or  $n$

present in plurality within the same molecule may be the same or different, provided that  $R^1$  or  $R^2$  present in plurality within the same molecule are not a hydrogen atom at the same time).

#### [DETAILED DESCRIPTION OF THE INVENTION]

[0001]

#### [Technical Field to Which the Invention Belongs]

The present invention relates to a highly ion conductive solid polymer electrolyte comprising a polymer compound containing a branched carbonate group as a main component and an electrolyte salt, which is useful for various electrochemical devices; a polymerizable compound and a polymerizable composition for obtaining the solid polymer electrolyte; and a battery, an electric double-layer capacitor and an electrochromic device using the solid polymer electrolyte.

[0002]

#### [Background Art]

With the popularization of portable instruments in recent years, various batteries and capacitor devices such as electric double-layer capacitor are becoming lightweight and also, the production thereof is abruptly increasing. Furthermore, for the popularization in future of hybrid car, electric car and the like which are highly expected from an environmental aspect, those capacitor devices are recently

demanded to have larger size and higher performance. Among the batteries, nonaqueous batteries such as Li primary battery and Li ion secondary battery are growing because of their high voltage and high energy density. Also, electric double-layer capacitors using active carbon electrode having a high specific surface area as the polarizable electrode are also growing because of their high power density.

[0003]

With respect to the display material, flatness and small thickness are being taken notice of and studies on improvements of liquid crystal, organic EL and electrochromic (ECD) device are aggressively proceeding. Among these, ECD device brings about color change by an electrochemical reaction, does not spontaneously emit light and is low in the response speed, however, because of its memory property, ECD device is attracting an attention in view of its original need such as light-shielding glass, rather than as a display device.

[0004]

These capacitor devices and ECD devices each uses an electrochemical reaction and the electrolyte material used therein is demanded to have higher performance. The properties required for the electrolyte material include high ionic conductivity, broad range of electrochemical

stability, impregnation property into various electrodes, heat resistance, environmental resistance and safety. In particular, Li (ion) battery as a nonaqueous capacitor device, and nonaqueous electric double-layer capacitor are attracting an attention at present because of their high voltage and high energy density. The electrolyte material used therefor is particularly demanded to satisfy the following requirements: to be improved in the ionic conductivity, to have an electrochemical stability range broad enough to endure high voltage use, to be easily compounded with various electrode materials and to have excellent safety.

[0005]

Conventional liquid electrolytes have a problem in that the safety and reliability decrease due to liquid leakage or volatilization and in order to solve this problem, a solid polymer electrolyte obtained by solidifying an electrolyte salt with a polymer or the like is being taken notice of in recent years. Examples thereof include a solid polymer electrolyte characterized by the introduction of a polyether chain into a polymer (see, JP-A-4-211412 (the term "JP-A" as used herein means an "unexamined published Japanese patent application")). This solid polymer electrolyte is improved in the safety and stability but suffers from reduction in the ionic



conductivity or deterioration in the compounding property with various electrode materials and also from a problem such that when the solid polymer electrolyte is used in various electrochemical devices, the device has small takeout current.

[0006]

In order to solve these problems of the solid polymer electrolyte, the present inventors have proposed a solid polymer electrolyte using a polymer having a carbonate structure, and a polymerizable compound and a polymerizable composition for obtaining the solid polymer electrolyte (see, for example, JP-A-11-149823 and JP-A-11-149824).

JP-A-1-311573 describes an electrochemical apparatus using a solid polymer electrolyte comprising a polymer having bonded thereto a side chain having no active hydrogen atom, where poly(ethylene ether carbonate) end capped with methacrylate is described as an example of the polymer.

[0007]

JP-A-9-147912 describes a solid polymer electrolyte having both flexibility and rigidity and improved in the adhesive property to alkali electrode and in the interface resistance by using a copolymer of poly(alkylene-(ether)carbonate end capped with methacrylate, similarly to JP-A-1-311573, and polyether end capped with methacrylate.

[0008]

Also, JP-A-62-30147 and JP-A-62-30148 disclose a solid polymer electrolyte using polyalkylene carbonate having a specific structure, which enhances the compatibility of an organic solvent or an electrolyte salt and improves the mechanical properties.

[0009]

The carbonate structure has a high dielectric constant and therefore, improves the solubility of electrolyte salt and compatibility with various organic solvents and in turn, the solid polymer electrolyte is improved in the ionic conductivity. Furthermore, a broad electrochemical stability range is ensured and this is suited for the fabrication of devices having a high voltage. However, the polymer having a carbonate structure has a high viscosity as compared with polyether-based polymers conventionally used for the polymer solid electrolyte and suffers from poor compounding property with various electrode materials.

[0010]

[Problems to be Solved by the Invention]

An object of the present invention is to improve the processability and compounding property with electrode of the carbonate-based polymer having high dielectric constant, high ionic conductivity and high electrochemical stability and thereby provide a solid polymer electrolyte favored

with high ionic conductivity and excellent in the durability, electrochemical stability, processability, safety and reliability.

Another object of the present invention is to provide a primary battery and a secondary battery facilitated in the formation into a thin film, broad in the operation voltage, capable of working with high capacity and high current, favored with a long life and excellent in the reliability and processability.

[0011]

Still another object of the present invention is to provide an electric double-layer capacitor having high output voltage, large takeout current, good processability, long life and excellent reliability by using the above-described carbonate-based solid polymer electrolyte.

[0012]

Still another object of the present invention is to provide an electrochromic device having good processability, high response speed, long life and excellent reliability by using the above-described carbonate-based solid polymer electrolyte.

[0013]

[Means to Solve the Problems]

As a result of extensive investigations to solve the above-described problems, the present inventors have found

that by introducing a branched chain into a carbonate chain to reduce the viscosity of a carbonate-based polymer, a solid polymer electrolyte having excellent processability can be obtained. Furthermore, when the carbonate-based polymer having introduced therein a branched chain is diluted with a solvent or the like to reduce the viscosity, a higher effect of reducing the viscosity can be brought out. This is presumed resultant from the interaction between polymers being weakened by the introduction of a branched chain.

[0014]

The present inventors have also found that by polymerizing a low molecular weight polymerizable compound having a branched carbonate chain, a solid polymer electrolyte having excellent compounding property with an electrode material of various electrochemical devices can be obtained.

[0015]

Still further, the present inventors have found that by using the above-described solid polymer electrolyte, a primary battery and a secondary battery having broad operation voltage, capability of working with high capacity and high current, long life, no liquid leakage and excellent safety and reliability, an electric double-layer capacitor having high output voltage, large takeout current,

good processability, long life, no liquid leakage and excellent safety and reliability, and an electrochromic device having high response speed, long life, no liquid leakage and excellent reliability can be obtained.

[0016]


That is, the present invention provides a solid polymer electrolyte, a polymerizable compound composition for a solid polymer electrolyte, and a battery, an electric double-layer capacitor and an electrochromic device using these, which are described below.

[0017]

1) A solid polymer electrolyte comprising a polymer compound having a branched carbonate structure represented by formula (1) as a partial structure and at least one electrolyte salt:

[0018]

[Chem. 6]

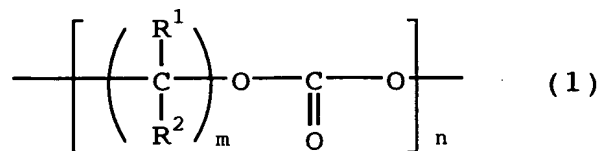

[0019]


(wherein R<sup>1</sup> and R<sup>2</sup> each represents a hydrogen atom, an alkyl group having from 1 to 10 carbon atoms, an alkoxy group having from 1 to 10 carbon atoms or an alkoxyalkyl group having from 1 to 10 carbon atoms, the alkyl, alkoxy or

alkoxyalkyl group may have a linear, branched or cyclic structure, m represents an integer of 3 to 10, n represents an integer of 1 to 500, and R<sup>1</sup>, R<sup>2</sup>, m or n present in plurality within the same molecule may be the same or different, provided that R<sup>1</sup> or R<sup>2</sup> present in plurality within the same molecule are not a hydrogen atom at the same time).

2) A solid polymer electrolyte comprising a polymer compound having a branched carbonate structure represented by formula (2) as a partial structure and at least one electrolyte salt:

[0020]

[Chem. 7]



[0021]



(wherein R<sup>3</sup> represents a hydrogen atom, an alkyl group having from 1 to 10 carbon atoms, an alkoxy group having from 1 to 10 carbon atoms or an alkoxyalkyl group having from 1 to 10 carbon atoms, the alkyl, alkoxy or alkoxyalkyl group may have a linear, branched or cyclic structure, m represents an integer of 3 to 10, n represents an integer of 1 to 500, and R<sup>3</sup>, m or n present in plurality within the same molecule may be the same or different, provided that R<sup>3</sup>

present in plurality within the same molecule are not a hydrogen atom at the same time).

3) A solid polymer electrolyte which is a polymer of a polymerizable compound having a branched carbonate structure described in 1) or 2) above and a polymerizable functional group represented by the following formula (3) and/or (4):

[0022]

[Chem. 8]

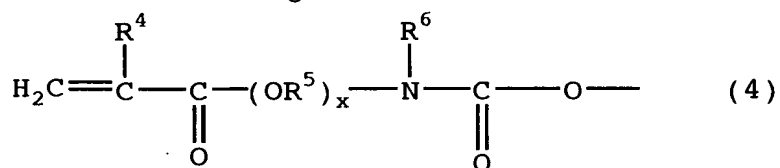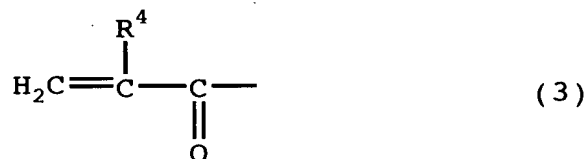

[0023]

(wherein R<sup>4</sup> represents a hydrogen atom or an alkyl group having from 1 to 10 carbon atoms, R<sup>6</sup> represents a hydrogen atom, an alkyl group having from 1 to 10 carbon atoms, an alkoxy group having from 1 to 10 carbon atoms or an alkoxyalkyl group having from 1 to 10 carbon atoms, the alkyl, alkoxy or alkoxyalkyl group may have a linear, branched or cyclic structure, R<sup>5</sup> represents a divalent group which may contain a heteroatom and may have a linear, branched or cyclic structure, and x represents 0 or 1,

provided that  $R^4$ ,  $R^5$ ,  $R^6$  or  $x$  present in plurality within the same molecule may be the same or different).

4) The solid polymer electrolyte as described in 3) above, wherein the polymerizable compound has a weight average molecular weight of 100 to 3,000.

5) The solid polymer electrolyte as described in 3) or 4) above, wherein the polymerizable compound is liquid at room temperature and the viscosity thereof is 5,000 mPa·S (25°C) or less.

6) The solid polymer electrolyte as described in any one of 1) to 5) above, which comprises at least one organic solvent.

7) A polymerizable composition for solid polymer electrolytes, comprising at least one polymerizable compound described in any one of 3), 4) and 5) above and at least one electrolyte salt.

8) The polymerizable composition for solid polymer electrolytes as described in 7) above, which comprises at least one organic solvent.

9) The polymerizable composition for solid polymer electrolytes as described in 8) above, wherein the viscosity is 6.0 mPa·S (25°C) or less.

10) A solid polymer electrolyte obtained by polymerizing the polymerizable composition described in 7) above.



11) A solid polymer electrolyte obtained by polymerizing the polymerizable composition described in 8) above.

12) A solid polymer electrolyte obtained by polymerizing the polymerizable composition described in 9) above.

13) The solid polymer electrolyte as described in any one of 1), 2), 10), 11) and 12) above, wherein the electrolyte salt is at least one electrolyte salt selected from an alkali metal salt, a quaternary ammonium salt and a quaternary phosphonium salt.

14) The polymerizable composition for a solid polymer electrolyte as described in any one of 7), 8) and 9) above, wherein the electrolyte salt is at least one electrolyte salt selected from an alkali metal salt, a quaternary ammonium salt and a quaternary phosphonium salt.

15) The solid polymer electrolyte as described in any one of 6), 11) and 12) above, wherein the organic solvent is at least one organic solvent selected from carbonates, aliphatic esters, ethers, lactones, sulfoxides and amides.

[0024]

16) The polymerizable composition for solid polymer electrolytes as described in 8) or 9) above, wherein the organic solvent is at least one organic solvent selected from carbonates, aliphatic esters, ethers, lactones,

sulfoxides and amides.

17) A battery using a solid polymer electrolyte described in any one of 1) to 6), 10) to 13) and 15) above.

18) The battery as described in 17) above, which is a lithium primary or lithium secondary battery using, as the electrolyte salt, at least one member selected  $\text{LiPF}_6$ ,  $\text{LiBF}_4$ ,  $\text{LiAsF}_6$  and  $\text{LiN}(\text{A-SO}_2)_2$  (wherein A represents a perfluoroalkyl group having from 1 to 10 carbon atoms).


19) An electric double-layer capacitor using a solid polymer electrolyte described in any one of 1) to 6), 10) to 13) and 15) above.

20) An electrochromic device using a solid polymer electrolyte described in any one of 1) to 6), 10) to 13) and 15) above.

21) A polymerizable compound represented by formula (5):

[0025]

[Chem. 9]

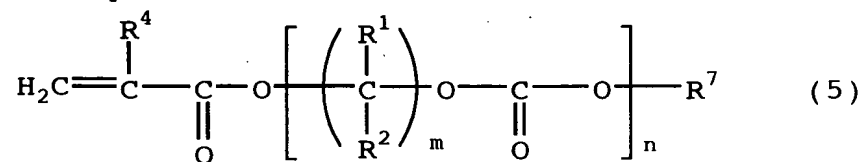

[0026]


(wherein  $\text{R}^1$  and  $\text{R}^2$  each represents a hydrogen atom, an alkyl group having from 1 to 10 carbon atoms, an alkoxy group having from 1 to 10 carbon atoms or an alkoxyalkyl group

having from 1 to 10 carbon atoms, the alkyl, alkoxy or alkoxyalkyl group may have a linear, branched or cyclic structure, m represents an integer of 3 to 10, n represents an integer of 1 to 500, R<sup>4</sup> represents hydrogen or an alkyl group having from 1 to 10 carbon atoms, the alkyl group may have a linear, branched or cyclic structure, R<sup>7</sup> represents a chained, branched and/or cyclic organic group having from 1 to 30 carbon atoms, which may contain a heteroatom and/or an unsaturated bond, and R<sup>1</sup>, R<sup>2</sup>, R<sup>4</sup>, R<sup>7</sup>, m or n present in plurality within the same molecule may be the same or different, provided that R<sup>1</sup> or R<sup>2</sup> present in plurality within the same molecule are not a hydrogen atom at the same time).

22) A polymerizable compound represented by formula (6):

[0027]

[Chem. 10]

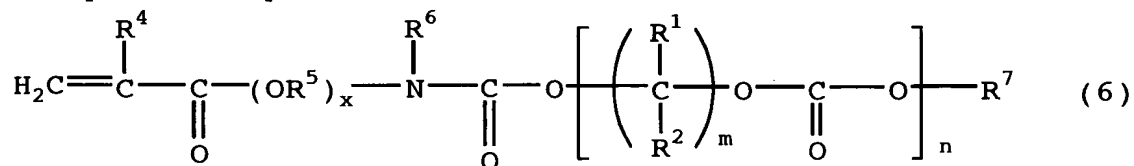

[0028]

(wherein R<sup>1</sup> and R<sup>2</sup> each represents a hydrogen atom, an alkyl group having from 1 to 10 carbon atoms, an alkoxy group having from 1 to 10 carbon atoms or an alkoxyalkyl group having from 1 to 10 carbon atoms, the alkyl, alkoxy or

alkoxyalkyl group may have a linear, branched or cyclic structure, m represents an integer of 3 to 10, n represents an integer of 1 to 500, x represents 0 or 1, R<sup>4</sup> represents a hydrogen atom or an alkyl group having from 1 to 10 carbon atoms, the alkyl group may have a linear, branched or cyclic structure, R<sup>7</sup> represents a chained, branched and/or cyclic organic group having from 1 to 30 carbon atoms, which may contain a heteroatom and/or an unsaturated bond, R<sup>6</sup> represents a hydrogen atom, an alkyl group having from 1 to 10 carbon atoms, an alkoxy group having from 1 to 10 carbon atoms or an alkoxyalkyl group having from 1 to 10 carbon atoms, the alkyl, alkoxy or alkoxyalkyl group may have a linear, branched or cyclic structure, R<sup>7</sup> represents a chained, branched and/or cyclic organic group having from 1 to 30 carbon atoms, which may contain a heteroatom and/or an unsaturated bond, and R<sup>1</sup>, R<sup>2</sup>, R<sup>4</sup>, R<sup>5</sup>, R<sup>6</sup>, R<sup>7</sup>, m or n present in plurality within the same molecule may be the same or different, provided that R<sup>1</sup> or R<sup>2</sup> present in plurality within the same molecule are not a hydrogen atom at the same time).

[0029]

[Mode for Carrying Out the Invention]

The present invention is described in detail below.

[0030]

(Solid Polymer Electrolyte)

The solid polymer electrolyte of the present invention fundamentally comprises (a) a polymer compound and (b) an electrolyte salt as main constituent components and may further comprise (c) an organic solvent and other additives such as inorganic oxide. . Respective components are described in detail below.


[0031]

(a) Polymer Compound

The polymer compound as a main constituent component of the solid polymer electrolyte of the present invention is electronically non-conducting and can absorb and hold various organic polar solvents. This compound contains a crosslinked and/or side chain group having a branched carbonate structure represented by the following formula (1):

[0032]

[Chem. 11]

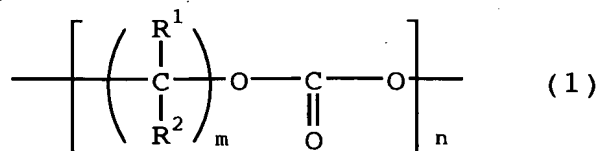

[0033]

(wherein R<sup>1</sup> and R<sup>2</sup> each represents a hydrogen atom, an alkyl group having from 1 to 10 carbon atoms, an alkoxy group

having from 1 to 10 carbon atoms or an alkoxyalkyl group having from 1 to 10 carbon atoms, the alkyl, alkoxy or alkoxyalkyl group may have a linear, branched or cyclic structure, m represents an integer of 3 to 10, n represents an integer of 1 to 500, and  $R^1$ ,  $R^2$ , m or n present in plurality within the same molecule may be the same or different, provided that  $R^1$  or  $R^2$  present in plurality within the same molecule are not a hydrogen atom at the same time).

In the formula above, if m is too large, the relative ratio of the carbonate group in the polymer compound becomes small and this is disadvantageous in that the dielectric constant decreases, the electrolyte salt is difficult to dissociate and the polymer compound is increased in the hydrophobicity and decreased in the compatibility with various polar solvents. If m is excessively small, the flexibility of the polymer decreases and at the time of synthesis, production of cyclic by-products disadvantageously increases. m is preferably from 3 to 8.

[0034]

When a branched chain is introduced into a polymer compound as in the formula above, the polymer compound is reduced in the crystallinity and in the melting point, glass transition point or viscosity. However, if the number

of carbon atoms in R<sup>1</sup> or R<sup>2</sup> is excessively large, the hydrophobicity of the polymer compound increases and this is disadvantageous in that the dielectric constant decreases, the electrolyte salt is difficult to dissociate and the compatibility with various polar solvents decreases. The number of carbon atoms in R<sup>1</sup> or R<sup>2</sup> is preferably from 1 to 5.


In the polymer used for the solid polymer electrolyte of the present invention, the number n of continuous repetition of the carbonate structure represented by formula (1) is from 1 to 500.

[0035]

In another embodiment, the polymer compound for use in the present invention comprises a crosslinked and/or side chain group having a branched carbonate structure represented by formula (2):

[0036]

[Chem. 12]



[0037]

(wherein R<sup>3</sup> represents a hydrogen atom, an alkyl group having from 1 to 10 carbon atoms, an alkoxy group having from 1 to 10 carbon atoms or an alkoxyalkyl group having

from 1 to 10 carbon atoms, the alkyl, alkoxy or alkoxyalkyl group may have a linear, branched or cyclic structure, m represents an integer of 3 to 10, n represents an integer of 1 to 500, and  $R^3$ , m or n present in plurality within the same molecule may be the same or different, provided that  $R^3$  present in plurality within the same molecule are not a hydrogen atom at the same time).

In the formula above, if m is too large, the relative ratio of the carbonate group in the polymer compound becomes small and this is disadvantageous in that the dielectric constant decreases, the electrolyte salt is difficult to dissociate and the polymer compound is increased in the hydrophobicity and decreased in the compatibility with various polar solvents. If m is excessively small, the flexibility of the polymer decreases and at the time of synthesis, production of cyclic by-products disadvantageously increases. m is preferably from 3 to 8.

[0038]

When a branched chain is introduced into a polymer compound as in the formula above, the polymer compound is reduced in the crystallinity and in the melting point, glass transition point or viscosity. However, if the number of carbon atoms in  $R^3$  is excessively large, the hydrophobicity of the polymer compound increases and this



is disadvantageous in that the dielectric constant decreases, the electrolyte salt is difficult to dissociate and the compatibility with various polar solvents decreases. The number of carbon atoms in R<sup>3</sup> is preferably from 1 to 5.


In the polymer used for the solid polymer electrolyte of the present invention, the number n of continuous repetition of the carbonate structure represented by formula (2) is from 1 to 500.

[0039]

The polymer for use in the solid polymer electrolyte of the present invention is preferably (A) a polymer obtained by polymerizing at least one polymerizable compound having a carbonate structure represented by formula (1) or (2) and having a polymerizable functional group represented by the following formula (3) and/or (4):

[0040]

[Chem. 13]

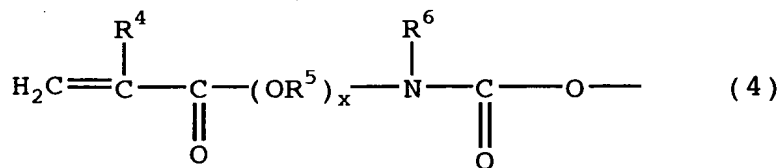

[0041]

(wherein R<sup>4</sup> represents a hydrogen atom or an alkyl group

having from 1 to 10 carbon atoms,  $R^6$  represents a hydrogen atom, an alkyl group having from 1 to 10 carbon atoms, an alkoxy group having from 1 to 10 carbon atoms or an alkoxyalkyl group having from 1 to 10 carbon atoms, the alkyl, alkoxy or alkoxyalkyl group may have a linear, branched or cyclic structure,  $R^5$  represents a divalent group which may contain a heteroatom and may have a linear, branched or cyclic structure, and x represents 0 or 1, provided that  $R^4$ ,  $R^5$ ,  $R^6$  or x present in plurality within the same molecule may be the same or different), because the obtained solid polymer electrolyte is facilitated in the processing or in the compounding with an electrode used for various electrochemical devices.

[0042]

A polymer obtained by polymerizing a compound having one functional group represented by formula (3) and/or (4) has no crosslinked structure and deficient in the film strength and therefore, when this polymer is formed into a thin film, short circuit may occur. Accordingly, the polymer is preferably crosslinked by copolymerizing with a polyfunctional polymerizable compound having two or more functional groups represented by formula (3) and/or (4), or preferably used in combination with a polymer obtained from a polyfunctional polymerizable compound having two or more functional groups represented by formula (3) and/or (4).

However, in the case where low viscosity is intended, a low molecular weight form of a monofunctional polymerizable compound having one functional group is preferably used in an amount as large as possible, because the crosslinking density does not increase after the polymerization and low viscosity can be attained. The amount of the monofunctional polymerizable compound mixed varies depending on the molecular weight or structure and cannot be indiscriminately limited, however, it is preferably from 20 to 90% by mass, more preferably from 40 to 85% by mass, based on all polymerizable compounds.

[0043]

Also, the polymer for use in the solid polymer electrolyte of the present invention may be (B) a copolymer obtained by copolymerizing at least one polymerizable compound having a polymerizable functional group represented by formula (3) and/or (4) and at least one polymerizable compound having a functional group copolymerizable with the above-described polymerizable compound and a carbonate structure represented by formula (1), or (C) a mixture of at least one polymer compound having a carbonate structure represented by formula (1) and a polymer obtained by polymerizing at least one polymerizable compound having a polymerizable functional group represented by formula (3) and/or (4).

The polymerizable compound for use in the solid polymer electrolyte of the present invention is preferably liquid at room temperature and low in the viscosity in view of the processability in the case of forming a solid polymer electrolyte by polymerizing the polymerizable compound or a polymerizable composition resultant from mixing with an electrolyte salt or the like, or in view of the impregnating ability in the case of performing the polymerization by injecting the compound or composition into an electrochemical device. The viscosity at 25°C of the polymerizable compound for use in the solid polymer electrolyte of the present invention is preferably 10,000 mPa·s or less, more preferably 5,000 mPa·s.

[0044]


The polymerizable compound for use in the solid polymer electrolyte of the present invention preferably has a molecular weight as small as possible so as to have a low viscosity. However, if the molecular weight is excessively small, the crosslinking density or crystallinity increases after the polymerization and this is disadvantageous in that the solid polymer electrolyte is reduced in the temperature characteristics of ionic conductivity or in the contacting property with various electrochemical device materials. The viscosity is affected not only by the molecular weight but also by the structure such as branched

chain, and therefore, the molecular weight of the polymerizable compound for use in the solid polymer electrolyte of the present invention is preferably from 100 to 3,000, more preferably from 150 to 1,500.

Specific examples of the polymerizable compound (A) include the compounds represented by the following formulae (5) and (6):

[0045]

[Chem. 14]

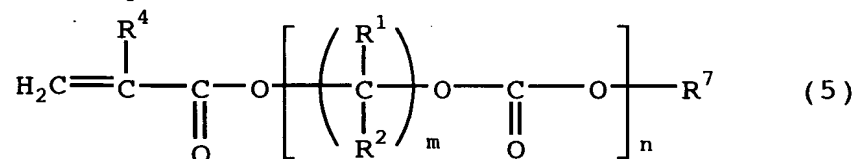


[0046]

(wherein R<sup>1</sup> and R<sup>2</sup> each represents a hydrogen atom, an alkyl group having from 1 to 10 carbon atoms, an alkoxy group having from 1 to 10 carbon atoms or an alkoxyalkyl group having from 1 to 10 carbon atoms, the alkyl, alkoxy or alkoxyalkyl group may have a linear, branched or cyclic structure, m represents an integer of 3 to 10, n represents an integer of 1 to 500, R<sup>4</sup> represents hydrogen or an alkyl group having from 1 to 10 carbon atoms, the alkyl group may have a linear, branched or cyclic structure, R<sup>7</sup> represents a chained, branched and/or cyclic organic group having from 1 to 30 carbon atoms, which may contain a heteroatom and/or an unsaturated bond, and R<sup>1</sup>, R<sup>2</sup>, R<sup>4</sup>, R<sup>7</sup>, m or n present in

plurality within the same molecule may be the same or different, provided that R<sup>1</sup> or R<sup>2</sup> present in plurality within the same molecule are not a hydrogen atom at the same time).

[0047]

[Chem. 15]

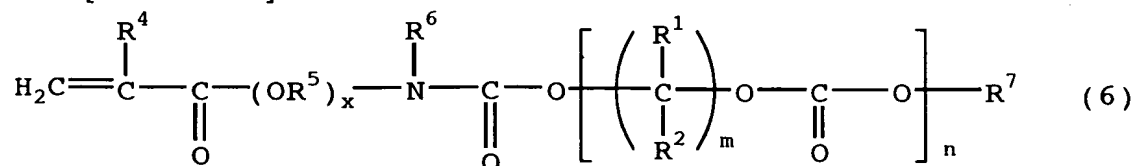

[0048]


(wherein R<sup>1</sup> and R<sup>2</sup> each represents a hydrogen atom, an alkyl group having from 1 to 10 carbon atoms, an alkoxy group having from 1 to 10 carbon atoms or an alkoxyalkyl group having from 1 to 10 carbon atoms, the alkyl, alkoxy or alkoxyalkyl group may have a linear, branched or cyclic structure, m represents an integer of 3 to 10, n represents an integer of 1 to 500, x represents 0 or 1, R<sup>4</sup> represents a hydrogen atom or an alkyl group having from 1 to 10 carbon atoms, the alkyl group may have a linear, branched or cyclic structure, R<sup>7</sup> represents a chained, branched and/or cyclic organic group having from 1 to 30 carbon atoms, which may contain a heteroatom and/or an unsaturated bond, R<sup>6</sup> represents a hydrogen atom, an alkyl group having from 1 to 10 carbon atoms, an alkoxy group having from 1 to 10 carbon atoms or an alkoxyalkyl group having from 1 to 10

carbon atoms, the alkyl, alkoxy or alkoxyalkyl group may have a linear, branched or cyclic structure,  $R^7$  represents a chained, branched and/or cyclic organic group having from 1 to 30 carbon atoms, which may contain a heteroatom and/or an unsaturated bond, and  $R^1$ ,  $R^2$ ,  $R^4$ ,  $R^5$ ,  $R^6$ ,  $R^7$ ,  $m$  or  $n$  present in plurality within the same molecule may be the same or different, provided that  $R^1$  or  $R^2$  present in plurality within the same molecule are not a hydrogen atom at the same time).

The method for synthesizing the polymerizable compound having a carbonate structure represented by formula (1) and a polymerizable functional group represented by formula (3) is not particularly limited and the polymerizable compound can be easily obtained, for example, by dehydration-condensing an acid having a polymerizable functional group, such as acrolyl acid, and a carbonate-ol having a hydroxyl group at the terminal, in the presence of an acid catalyst or the like as shown below.

[0049]

[Chem. 16]

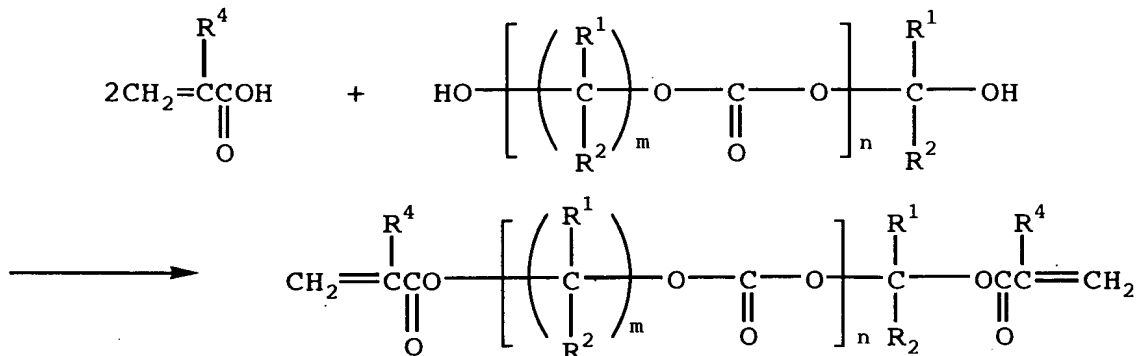


wherein  $\text{R}^1$ ,  $\text{R}^2$ ,  $\text{R}^4$ ,  $m$  and  $n$  have the same meanings as in formula (5).

[0050]

The method for synthesizing the polymerizable compound having a carbonate structure represented by formula (1) and a polymerizable functional group represented by formula (4) is not particularly limited and the polymerizable compound can be easily obtained, for example, by reacting an acryloyl-based isocyanate compound represented by the formula:

[0051]

[Chem. 17]

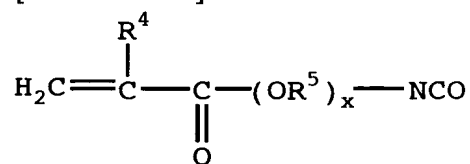

[0052]


with a carbonate-ol having a hydroxyl group at the terminal,



in the presence of a urethanization reaction catalyst as shown below.

[0053]

[Chem. 18]

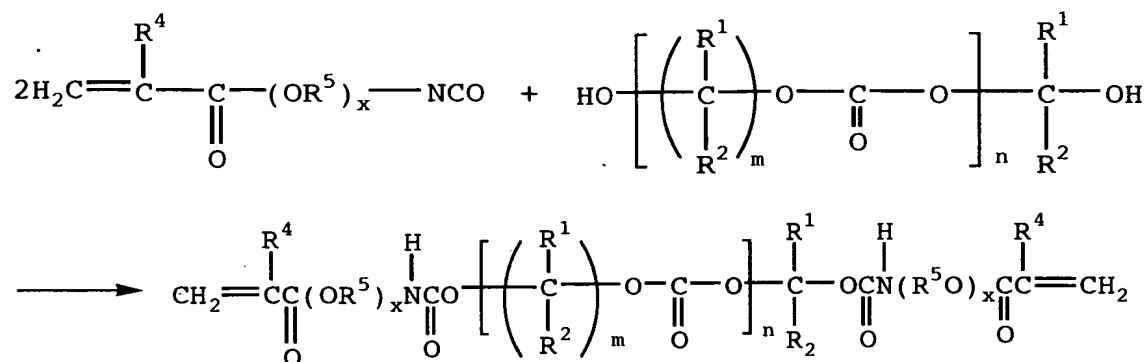

wherein R<sup>1</sup>, R<sup>2</sup>, R<sup>4</sup>, R<sup>5</sup>, n, m and x have the same meanings as in formula (6).

[0054]

The polymer compound obtained by polymerizing a compound having a polymerizable functional group represented by formula (4) contains a urethane group and this is advantageous in that the dielectric constant is high and the solid polymer electrolyte obtained is increased in the ionic conductivity. Furthermore, the compound having a polymerizable functional group represented by (4) has good polymerizability and when the compound is formed into a thin film, the film advantageously has a sufficiently high film strength and a large capacity of including an electrolytic solution.

[0055]

The polymerizable compound having a carbonate structure represented by formula (1) and at the same time, having a polymerizable functional group represented by formula (3) and/or (4), which is suitable for obtaining the polymer for use in the solid polymer electrolyte of the present invention, is polymerized in the presence of a polymerization initiator to form a solid polymer electrolyte. These polymerizable compounds can be used individually or in combination of two or more thereof. Also, at least one of these polymerizable compounds may be copolymerized with another polymerizable compound.

[0056]

The another polymerizable compound copolymerizable with the polymerizable compound having a carbonate structure represented by formula (1) and a polymerizable functional group represented by formula (3) and/or (4) is not particularly limited and examples thereof include (meth)acrylic acid alkyl esters such as methyl methacrylate and n-butyl acrylate; various urethane acrylates; (meth)acrylamide-based compounds such as acrylamide, methacrylamide, N,N-dimethylacrylamide, N,N-dimethylmethacrylamide, vinylene carbonate, (meth)acryloyl carbonate, N-vinylpyrrolidone, acryloylmorpholine, methacryloylmorpholine, N,N-dimethylaminopropyl

(meth)acrylamide; styrene-based compounds such as styrene and  $\alpha$ -methylstyrene; N-vinylamide-based compounds such as N-vinylacetamide and N-vinylformamide; and alkyl vinyl ethers such as ethyl vinyl ether. Among these, preferred are (meth)acrylic acid esters and urethane (meth)acrylates.

[0057]

The polymer for use in the solid polymer electrolyte of the present invention may be a polymer obtained from at least one polymerizable compound having a carbonate structure represented by formula (1) and a polymerizable functional group represented by formula (3) and/or (4), and/or a mixture of a copolymer using the above-described polymerizable compound as a copolymerization component with another polymer. Examples of the another polymer mixed include polyethylene oxides, polypropylene oxides, polyacrylonitrile, poly(meth)acrylic acid esters, polystyrene, polyphosphazene and polymers such as polysiloxane, polysilane, polyvinylidene fluoride and polytetrafluoroethylene.

The amount of the structural unit derived from the polymer having a carbonate structure represented by formula (1) varies depending on whether the polymerizable compound having a carbonate structure represented by formula (1) and at the same time, having a polymerizable functional group represented by formula (3) and/or (4) is homopolymerized,

copolymerized with another copolymerization component or mixed with another polymer and cannot be indiscriminately specified, however, in view of the ionic conductivity, film strength, heat resistance and current characteristics of the solid polymer electrolyte obtained, the content thereof is preferably 50% by mass or more, more preferably 70% by mass or more, based on the total amount of the polymer components.

[0058]

The polymerization of the polymerizable compound having a carbonate structure represented by formula (1) and a polymerizable functional group represented by formula (3) and/or (4) may be performed by a general method using the polymerizability of acryloyl or methacryloyl group as the functional group. More specifically, the polymerizable compound alone or a mixture of the polymerizable compound and another polymerizable compound copolymerizable therewith may be subjected to radical polymerization, cationic polymerization or anionic polymerization using a radical polymerization catalyst such as 2,2'-azobisisobutyronitrile (AIBN) and benzoyl peroxide (BPO), a cationic polymerization catalyst such as protonic acid (e.g.,  $\text{CF}_3\text{COOH}$ ) and Lewis acid (e.g.,  $\text{BF}_3$ ,  $\text{AlCl}_3$ ), or an anionic polymerization catalyst such as butyl lithium, sodium naphthalene and lithium alkoxide. Furthermore, the

polymerizable compound or polymerizable mixture may also be polymerized after forming it into a film or the like or after injecting or impregnating it into various electrode materials.

[0059]

(d) Electrolyte Salt

The kind of the electrolyte salt for use in the present invention is not particularly limited and any electrolyte may be used as long as it contains ion intended to use as a charge carrier. The electrolyte salt preferably has a large dissociation constant in a solid polymer electrolyte and examples thereof include alkali metal salts of trifluoromethanesulfonic acid, such as  $\text{LiCF}_3\text{SO}_3$ ,  $\text{NaCF}_3\text{SO}_3$  and  $\text{KCF}_3\text{SO}_3$ , alkali metal salts of perfluoroalkanesulfonic imide, such as  $\text{LiN}(\text{CF}_3\text{SO}_2)_2$  and  $\text{LiN}(\text{CF}_3\text{CF}_2\text{SO}_2)_2$ , alkali metal salts of hexafluorophosphoric acid, such as  $\text{LiPF}_6$ ,  $\text{NaPF}_6$  and  $\text{KPF}_6$ , perchlorate alkali metal salts such as  $\text{LiClO}_4$  and  $\text{NaClO}_4$ , tetrafluoroborates such as  $\text{LiBF}_4$  and  $\text{NaBF}_4$ , and alkali metal salts such as  $\text{LiSCN}$ ,  $\text{LiAsF}_6$ ,  $\text{LiI}$ ,  $\text{NaI}$ ,  $\text{NaAsF}_6$  and  $\text{KI}$ . Examples of the ammonium salt include quaternary ammonium salts of perchloric acid, such as tetraethylammonium perchlorate, quaternary ammonium salts of tetrafluoroboric acid, such as  $(\text{C}_2\text{H}_5)_4\text{NBF}_4$ , quaternary ammonium salts such as  $(\text{C}_2\text{H}_5)_4\text{NPF}_6$ , and quaternary phosphonium salts such as  $(\text{CH}_3)_4\text{P}^+\text{BF}_4$  and  $(\text{C}_2\text{H}_5)_4\text{P}^+\text{BF}_4$ . Among

these electrolytes, in view of solubility in an organic solvent and ionic conductivity,  $\text{LiPF}_6$ ,  $\text{LiBF}_4$ ,  $\text{LiAsF}_6$  and alkali metal salts and quaternary ammonium salts of perfluoroalkanesulfonic imide are preferred.

[0060]

The ratio between the polymer component and the electrolyte salt compounded in the solid polymer electrolyte of the present invention is preferably such that the electrolyte salt is from 0.1 to 50% by mass, more preferably from 1 to 30% by mass, based on the weight of polymer. If the electrolyte compounded is present in a proportion of 50% by mass or more, the ion transfer is greatly inhibited, whereas if the proportion thereof is less than 0.1% by mass, the absolute amount of ion is deficient and the ionic conductivity is low.

[0061]

(e) Organic Solvent

The solid polymer electrolyte of the present invention preferably contains an organic solvent because ionic conductivity of the solid polymer electrolyte is more improved. The organic solvent which can be used is suitably a compound having good compatibility with the polymer having a carbonate structure represented by formula (1) for use in the solid polymer electrolyte of the present invention, having a large dielectric constant, ensuring

high solubility of the electrolyte salt (b), having a boiling point of 60°C or more and being wide in the electrochemical stability range. An organic solvent (non-aqueous organic solvent) having a low water content is more preferred.

[0062]

Examples of such a solvent include ethers such as 1,2-diethoxyethane, 2-methyltetrahydrofuran, crown ether, triethylene glycol methyl ether and tetraethylene glycol dimethyl ether; carbonic esters such as ethylene carbonate, propylene carbonate, dimethyl carbonate, diethyl carbonate, methyl ethyl carbonate and vinylene carbonate; aliphatic esters such as methyl propionate and methyl formate; aromatic nitriles such as benzonitrile and tolunitrile; amides such as dimethylformamide; sulfoxides such as dimethylsulfoxide; lactones such as  $\gamma$ -butyrolactone; sulfur compounds such as sulfolane; N-methylpyrrolidone, N-vinylpyrrolidone and phosphoric esters. Among these, carbonic esters, aliphatic esters and ethers are preferred, and carbonates are more preferred. These solvents may be used individually or may be used as a mixed solvent by mixing two or more thereof.

[0063]

As the amount of the organic solvent added is larger, the solid polymer electrolyte obtained is more improved in

the ionic conductivity. Accordingly, the organic solvent content is generally larger, however, if the content is excessively large, the curability, the film forming property, or the liquid holding property or mechanical strength of the solid polymer electrolyte may be impaired. The content is preferably from 2 to 20 times, more preferably from 3 to 12 times, the mass of the polymer used for the solid polymer electrolyte of the present invention.

[0064]

(d) Inorganic Oxide

In the foregoing pages, the constituent components of the solid polymer electrolyte of the present invention are described one by one and as long as the object of the present invention is not inhibited, other additives may also be added.

[0065]

For example, the electrolyte may be used as a composite electrolyte having added thereto inorganic oxide fine particle of various types. By using as such, not only the strength and the film uniformity are improved but the ionic conductivity and mobility can also be increased without impairing the effect of improving the strength, because fine holes are generated between the inorganic oxide and the polymer and in particular, when a solvent is added, a free electrolytic solution disperses into the



holes, namely, within the composite electrolyte.

[0066]

For the inorganic oxide fine particle, those which are electronically non-conducting and electrochemically stable are selected. Particularly, those having ionic conductivity are preferred. Specific examples thereof include ion-conductive or electronically non-conducting ceramic fine particles such as  $\alpha$ -,  $\beta$ - or  $\gamma$ -alumina, silica, titania, magnesia and hydrotalcite.

[0067]

For the purpose of increasing the amount of electrolyte-containing solution held in the solid polymer electrolyte and increasing the ionic conductivity and mobility, the inorganic oxide fine particle preferably has a specific surface area as large as possible. The specific surface area by BET method is preferably  $5 \text{ m}^2/\text{g}$  or more, more preferably  $50 \text{ m}^2/\text{g}$  or more. The crystal grain size of the inorganic oxide fine particle is not particularly limited insofar as it can be mixed with a polymerizable composition, however, the size (average crystal grain size) is preferably from  $0.01$  to  $20 \text{ }\mu\text{m}$ , more preferably from  $0.01$  to  $2 \text{ }\mu\text{m}$ .

[0068]

The inorganic fine particle used may have various shapes such as spherical, egg-like, cubic, rectangular,

cylindrical and bar-like forms.

[0069]

If the amount of the inorganic fine particle added is excessively large, the solid polymer electrolyte is disadvantageously reduced in the strength or ionic conductivity, or becomes difficult of film formation. Accordingly, the amount of the inorganic fine particle added is preferably 50% by mass or less, more preferably from 0.1 to 30% by mass, based on the solid polymer electrolyte.

[0070]

[Production Process of Solid Polymer Electrolyte]

The solid polymer electrolyte of the present invention can be produced by forming a polymer obtained from at least one polymerizable compound described above or a copolymer using the polymerizable compound as a copolymerization component into a film, polymerizing the film and contacting it with an electrolyte salt dissolved in an organic solvent, or by preparing a polymerizable composition comprising the polymerizable compound and other components, molding the composition, for example, into a film and polymerizing the film.

[0071]

To speak more specifically, in the latter method, at least one polymerizable compound and at least one

electrolyte salt such as alkali metal salt, quaternary ammonium salt, quaternary phosphonium salt and transition metal salt, are mixed and after adding and mixing, if desired, another polymerizable compound, a plasticizer, an organic solvent and/or an inorganic oxide to prepare a polymerizable composition, the composition is formed into a film and polymerized under heating and/or irradiation of active rays in the presence or absence of an initiator described above, whereby a solid polymer electrolyte of the present invention is obtained. According to this method, the latitude of processing is broadened and this is greatly advantageous in the application.

[0072]

The conditions preferred for the curing of polymerizable composition may be determined by selecting a thermopolymerization initiator according to the desired molding temperature, the kind and curability of the polymerizable compound, and the boiling point of solvent and by referring to the temperature necessary for halving the active oxygen amount in the initiator (half-life temperature). The curing temperature and the curing rate may be determined based on the half-life and activation energy of the thermopolymerization initiator. For example, the temperature necessary for the half-life of 10 hours is from room temperature to 100°C, preferably from 40°C to 70°C.

[0073]

In the case of polymerization under irradiation of active rays, although it may vary depending on the kind of the polymerizable compound, the polymerization may be performed, for example, by irradiating ultraviolet ray of several mW or more using an initiator such as benzyl methyl ketal and benzophenone, or by irradiating  $\gamma$  ray, electron beam or the like using a solvent. The solvent may be any as long as it does not inhibit the polymerization.

[0074]

The solid polymer electrolyte of the present invention may also be used as a composite electrolyte by compounding it with, for example, a porous polymer film of various types so as to improve strength, form uniform film or prevent short circuit between electrodes. In this case, depending on the kind of the polymer used, the film shape or the compounding ratio, the separator after the absorption of electrolytic solution may be reduced in the ionic conductivity or deteriorated in the stability, therefore, the film compounded must be appropriately selected. Examples of the film compounded include porous polyolefin sheet such as polypropylene non-woven fabric and network polyolefin sheet (e.g., polyethylene-made net), polyolefin-made microporous film such as CELLGUARD (trade name), nylon non-woven fabric, glass fiber and ceramic

fiber. Among these, porous polyolefin film is preferred.

[0075]

The porous polymer film compounded may be sufficient if it has a porosity on the order of 10 to 95% and a thickness on the order of 1 to 200  $\mu\text{m}$ , however, the porosity is preferably large as much as possible insofar as the strength is not impaired. The porosity is preferably from 40 to 95% and the thickness is preferably from 5 to 50  $\mu\text{m}$ .

The compounding method is not particularly limited, however, for example, a polymerizable composition obtained by adding and mixing at least one polymerizable compound described above or additionally at least one electrolyte salt and depending on the case, other components, is impregnated into a porous polymer film and the (meth)acryloyl-based compound is polymerized, whereby uniform compounding can be attained and the film thickness can be easily and simply controlled.

[0076]

The use embodiment of the solid polymer electrolyte of the present invention is described in greater detail below by referring to a battery, an electric double-layer capacitor and an electrochromic device.

[0077]

### [3] Battery and Production Process Thereof

Fig. 1 is a schematic cross sectional view showing one example of a thin-film solid battery which is a battery according to the present invention. In the figure, 1 is positive electrode, 2 is porous separator, 3 is negative electrode, 4 is collector, 5 is heat fusion polymer film, 6 is a device case and 7 is a solid polymer electrolyte.

[0078]

In the construction of the battery according to the present invention, when an electroactive substance (positive electroactive substance) having a high oxidation-reduction potential, such as metal oxide, metal sulfide, electrically conducting polymer or carbon material, is used for the positive electrode 1, a battery having high voltage and high capacity can be obtained. Among these electroactive substances, metal oxides such as cobalt oxide, manganese oxide, vanadium oxide, nickel oxide and molybdenum oxide, and metal sulfides such as molybdenum sulfide, titanium sulfide and vanadium sulfide, are preferred because the filling density and volume capacity density can be increased. In view of high capacity and high voltage, manganese oxide, nickel oxide and cobalt oxide are more preferred.

[0079]

In this case, the method for producing the metal oxide or metal sulfide is not particularly limited and these may be produced by a general electrolytic method or heating method described, for example, in Denki Kagaku (Electrochemistry), Vol. 22, page 574 (1954). In the case of a lithium battery, the electroactive substance is preferably used in such a state that Li element is intercalated (compounded) in the metal oxide or metal sulfide, for example, in the form of  $\text{Li}_x\text{CoO}_2$  and  $\text{Li}_x\text{Mn}_2\text{O}_4$ . The method for intercalating Li element as such is not particularly limited and for example, a method of electrochemically intercalating Li ion or a method described in U.S. Patent 4,357,215, where a salt such as  $\text{Li}_2\text{CO}_3$  is mixed with a metal oxide and then heat-treated, may be used.

[0080]

In view of easy formation of flexible and thin film, an electrically conducting polymer is preferred. Examples of the electrically conducting polymer include polyaniline, polyacetylene and derivatives thereof, poly-p-phenylene and derivatives thereof, polypyrrole and derivatives thereof, polythienylene and derivatives thereof, polypyridinediyl and derivatives thereof, polyisothianaphthenylene and derivatives thereof, polyfurylene and derivatives thereof,

polyselenophene and derivatives thereof, and polyarylene vinylene and derivatives thereof, such as poly-p-phenylene vinylene, polythienylene vinylene, polyfurylene vinylene, polynaphthenylene vinylene, polyselenophene vinylene and polypyridinediyl vinylene. Among these, preferred are organic solvent-soluble polymers of aniline derivatives.

Examples of the carbon material include natural graphite, artificial graphite, vapor grown graphite, petroleum coke, coal coke, pitch-type carbon, polyacene, and furalene such as C60 and C70.

[0081]

The negative electroactive substance used for the negative electrode 3 of the battery according to the present invention is preferably a substance having a low oxidation-reduction potential and using the above-described alkali metal ion as the carrier, such as alkali metal, alkali metal alloy, carbon material, metal oxide and metal chalcogenide, so as to attain a high-voltage and high-capacity battery. Among these negative electroactive substances, lithium metals and lithium alloys, such as lithium/aluminum metal, lithium/lead alloy and lithium/antimony alloy, are more preferred in view of their lowest oxidation-reduction potential. In addition, carbon materials having occluded therein lithium ion are also preferred because a low oxidation-reduction potential is



exhibited and these are stable and safe. Examples of the material capable of occluding or releasing lithium ion include inorganic compounds such as tin oxide, natural graphite, artificial graphite, vapor grown graphite, petroleum coke, coal coke, pitch-type carbon, polyacene, and furalene such as C60 and C70.

[0082]

For the collector 4, a material having electronic conduction, electrochemical corrosion resistance and a surface area as large as possible is preferably used. Examples thereof include various metals and sintered body thereof, electronically conducting polymers and carbon sheet.

[0083]

One example of the production process of the battery according to the present invention is described below.

A positive electrode 1 and a negative electrode 3 formed on a collector by interposing a porous separator 2 therebetween not to come into contact with each other are placed in an aluminum laminate-made device case 6. Then, a polymerizable composition which can work out to the solid polymer electrolyte of the present invention and in which a thermopolymerization initiator is added, is injected and impregnated. Thereafter, the opening is sealed through a heat fusion polymer film 5 and the polymerizable

composition within the battery is cured by heating. As a result, a thin solid battery shown in Fig. 1 is obtained, where a positive electrode 1, a negative electrode 3, a separator 2 and a solid polymer electrolyte 7 are uniformly adhering. The device case is not limited to the aluminum laminate but a metal such as SUS, a resin such as polypropylene, a ceramic such as insulating glass, or the like may also be used according to the end use without any particular limitation. The device case may have any shape, such as cylinder, box or sheet.

[0084]

The battery containing the solid polymer electrolyte of the present invention may also be produced by a method of impregnating the polymerizable composition into a positive electrode 1 and/or a negative electrode 3, curing the composition, coating further the polymerizable composition on either one electrode to have a uniform thickness, and curing it by the above-described method to form a solid polymer electrolyte film 7 on the electrode. Thereafter, another electrode is attached to the thus-formed solid polymer electrolyte film layer, the whole is placed in an aluminum laminate-made device case 6, and the opening is sealed through a heat fusion polymer film 5, whereby a thin solid battery shown in Fig. 1 is obtained. In this case, if the solid polymer electrolyte film formed

on the electrode has no problem in the mechanical strength, a porous separator is not necessary.

[0085]

[4] Electric Double-Layer Capacitor and Production Process Thereof

The electric double-layer capacitor of the present invention is described below.

According to the present invention, an electric double-layer capacitor having high output voltage and large takeout current and being excellent in processability, life and reliability is provided by using the solid polymer electrolyte of the present invention.

[0086]

Fig. 2 is a schematic cross-sectional view showing one example of an electric double-layer capacitor according to the present invention. This example is a thin cell having a size of about 1 cm x 1 cm and a thickness of about 0.5 mm, where 11 is a collector, a pair of polarizable electrodes 8 and 10 are disposed in the inner side of the collector, and a porous separator 9 compounded with a solid polymer electrolyte film 14 of the present invention is disposed therebetween. The numeral 13 is a device case and 12 is a heat fusion polymer film.

[0087]

The polarizable electrodes 8 and 10 are not

particularly limited as long as they are an electrode comprising a polarizable material such as carbon material. The polarizable electrodes preferably have a larger specific surface area, because the electric double layer can have a larger capacity. Examples of the material include carbon black materials such as furnace black, thermal black (including acetylene black) and channel black, active carbon materials such as coco shell carbon, natural graphite, artificial graphite, so-called pyrolytic graphite produced by the vapor phase method, polyacene, C60 and C70.

[0088]

For the collector 11, a material having electronic conduction, electrochemical corrosion resistance and a specific surface area as large as possible is preferably used. Examples thereof include various metals and sintered body thereof, electronically conducting polymers and carbon sheet.

[0089]

With respect to the shape of the electric double-layer capacitor, other than the sheet form shown in Fig. 2, a coin form or a cylindrical form may be used. The cylindrical electric double-layer capacitor is produced by rolling up a sheet laminate of polarizable electrodes and a solid polymer electrolyte into a cylindrical form, placing the roll in a cylindrical tubular structure body for

constructing a capacitor, and sealing it.

[0090]

The kind of the electrolyte salt for use in the electric double-layer capacitor of the present invention is not particularly limited and a compound containing ion intended to serve as the charge carrier may be used. However, those containing ion capable of exhibiting a large dissociation constant in the solid polymer electrolyte and readily forming an electric double layer with the polarizable electrodes are preferred. Examples of such a compound include quaternary ammonium salts such as  $(\text{CH}_3)_4\text{NBF}_4$  and  $(\text{CH}_3\text{CH}_2)_4\text{NClO}_4$ , transition metal salts such as  $\text{AgClO}_4$ , quaternary phosphonium salts such as  $(\text{CH}_3)_4\text{PBF}_4$ , alkali metal salts such as  $\text{LiCF}_3\text{SO}_3$ ,  $\text{LiPF}_6$ ,  $\text{LiClO}_4$ ,  $\text{LiI}$ ,  $\text{LiBF}_4$ ,  $\text{LiSCN}$ ,  $\text{LiAsF}_6$ ,  $\text{Li}(\text{CF}_3\text{SO}_2)_2$ ,  $\text{NaCF}_3\text{SO}_3$ ,  $\text{NaPF}_6$ ,  $\text{NaClO}_4$ ,  $\text{NaI}$ ,  $\text{NaBF}_4$ ,  $\text{NaAsF}_6$ ,  $\text{KCF}_3\text{SO}_3$ ,  $\text{KPF}_6$  and  $\text{KI}$ , organic acids and salts thereof such as p-toluenesulfonic acid, and inorganic acids such as hydrochloric acid and sulfuric acid. Among these, from the standpoint that high output voltage can be taken out and the dissociation constant is large, quaternary ammonium salts, quaternary phosphonium salts and alkali metal salts are preferred. Among quaternary ammonium salts, those where the substituents on nitrogen of the ammonium ion are different, such as  $(\text{CH}_3\text{CH}_2)(\text{CH}_3\text{CH}_2\text{CH}_2\text{CH}_2)_3\text{NBF}_4$ , are preferred because the solubility or dissociation constant in the

solid polymer electrolyte is large.

[0091]

One example of the production process of the electric double-layer capacitor according to the present invention is described below.

Polarizable electrode sheets 8 and 10 coated and formed on two collectors 11 are placed in an aluminum laminate-made device case 13 not to come into contact with each other by interposing a porous separator 9 therebetween. Thereafter, a polymerizable composition which can work out to the solid polymer electrolyte of the present invention and in which a thermopolymerization initiator is added, is injected and impregnated. After sealing the opening through a heat fusion polymer film 12, the polymerizable composition within the battery is cured by heating to obtain a thin solid electric double-layer capacitor shown in Fig. 2, where polarizable electrodes 8 and 10, a porous separator 9 and a solid polymer electrolyte 14 are uniformly adhering. The device case is not limited to the aluminum laminate but a metal such as SUS, a resin such as polypropylene, a ceramic such as insulating glass, or the like may also be used according to the end use without any particular limitation.

[0092]

[5] Electrochromic Device (ECD) and Production Process Thereof

Fig. 3 is a cross-sectional view of a thin film solid ECD having an area of 1.5x1.5 cm, which is one example of ECD of the present invention. In the figure, 15 is a transparent electrically conducting electrode, an electrochromic (EC) layer 16 is formed thereon, and a solid polymer electrolyte film 17 is disposed further thereon. The numeral 18 is a counter electrode, 19 is an insulating film spacer, 20 is an insulating resin sealant and 21 is a lead wire.

[0093]

In the construction of ECD of the present invention, the EC layer 16 is sufficient if color change can reversibly take place by the oxidation and reduction. Representative examples thereof include metal oxides such as tungsten oxide, metal sulfides, viologen derivatives and polymers thereof, and electrically conducting polymers such as polyaniline, polypyrrole, polythiophene and polyisothianaphthene.

[0094]

The transparent electrically conducting electrode 15 preferably has high electronic conductance, electrochemical corrosion resistance and, if possible, flexibility. For

this electrode, a metal such as gold, an electrically conducting oxide such as indium oxide, or an electrically conducting polymer formed into a thin film or compounded on a transparent polymer such as polycarbonate, polymethacrylate and polyethylene terephthalate, or on a glass sheet is used.

[0095]

The counter electrode preferably has capability of reversibly taking in or out the ion along the movement of ion of the EC layer and has a pale color so as to clearly show the color change of the EC layer. The material therefor varies depending on the combination with the EC layer and is not particularly limited but examples thereof include intercalation compounds such as metal oxide and metal sulfide, electrically conducting polymers, hydrogen-storing alloys, and alkali metals or alloys thereof.

[0096]

The production process of ECD of the present invention is described below.

An EC layer 16 and a counter electrode 18 are laminated not to come into contact with each other using an insulating film spacer 19 having a thickness as small as possible and disposed at the edge part of the electrode. Subsequently, a polymerizable composition which can work out to the solid polymer electrolyte of the present



invention and in which a thermopolymerization initiator is added, is injected and impregnated therebetween. After sealing the opening with an insulating resin sealant 20, the polymerizable composition within the ECD is cured by heating to obtain a solid ECD shown in Fig. 3, where an EC layer 16, a solid polymer electrolyte 17 and a counter electrode 18 are uniformly adhering.

[0097]

The viscosity can be determined using a rotary viscometer in accordance with the method described in JIS K7117 and can be measured at various shear rates by changing the rotating speed of the rotary viscometer. The change of viscosity with the passing of time can also be traced by continuously measuring the viscosity for a long period of time at a constant rotational frequency.

The measurement apparatus used is a B-Type viscometer manufactured by Tokimeck, which is corrected with a viscometer-correction standard solution in accordance with JIS Z 8809. The measurement is performed at 25°C in an argon atmosphere.

[0098]

[Examples]

The present invention is described in greater detail below by referring to the representative Examples, however, these are set forth merely for the purpose of illustration

and the present invention should not be construed as being limited thereto.


[0099]

Example 1: synthesis of polymerizable compound (Compound 2)

Carbonate-diol (produced by Nippon Polyurethane, weight average molecular weight: 500) (Compound 1) and methacrylate having an isocyanate group (produced by Showa Denko K.K.) (MI) were reacted according to the reaction formula shown below and a polymerizable compound (Compound 2) was obtained through the following procedure.

[0100]

[Chem. 19]

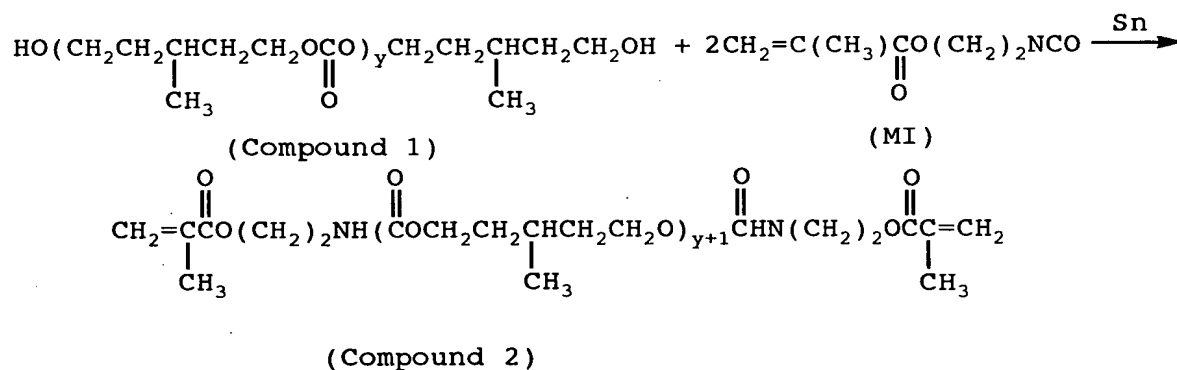

[0101]

To speak specifically, 50.0 g of dehydrated Compound 1 (weight average molecular weight: 500, hydroxyl group value: 224 KOHmg/g, water content: 30 ppm) and 32.0 g of MI were reacted in dry air at 50°C for about 5 hours while adding 0.1 g of dibutyltin dilaurate, as a result, a

colorless viscous liquid was obtained. It was found from  $^1\text{H}$ -NMR and  $^{13}\text{C}$ -NMR that Compound 1 and MI were reacted at 1:2 and since the absorption of isocyanate group of Compound 1 disappeared from the infrared absorption spectrum, a urethane bond was produced, revealing the production of Compound 2. The weight average molecular weight of Compound 2, determined by gel permeation chromatography, was 800 and the viscosity at 25°C was 7,000 mPa·s.


[0102]

Example 2: synthesis of polymerizable compound (Compound 3)

Compound 1 and commercially available methacrylic acid (MA) were reacted according to the reaction formula shown below and a polymerizable compound (Compound 3) was obtained through the following procedure.

[0103]

[Chem. 20]

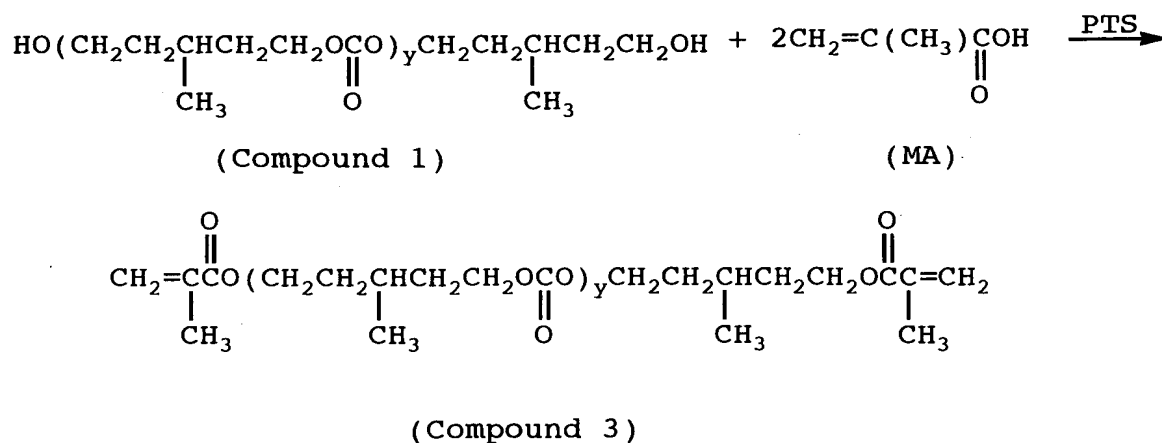

[0104]

To speak specifically, 50.0 g of Compound 1 and 20.0 g of MA were reacted in benzene at 90°C for about 10 hours while adding thereto 2.2 g of p-toluenesulfonic acid (PTS). Thereafter, the reaction solution was neutralized with an aqueous NaOH solution and then subjected to water washing and dehydration, as a result, a colorless viscous liquid was obtained. It was found from <sup>1</sup>H-NMR and <sup>13</sup>C-NMR that Compound 1 and MA were reacted at 1:2 to produce Compound 3.

The weight average molecular weight of this compound, determined by GPC, was 650 and the viscosity at 25°C was 230 mPa·s.

[0105]

Example 3: synthesis of polymerizable compound mixture (mixture of Compound 5 and Compound 6)

A mixture of Compound 1 and Compound 4 (1:1 by mol) and a commercially available acrylic acid (AA) were reacted according to the reaction formula shown below and a polymerizable compound (a mixture of Compound 5 and Compound 6) was obtained through the following procedure.

[0106]





To speak specifically, 50.0 g of a 1:1 (by mol) mixture (weight average molecular weight: 500, hydroxyl group value: 180 KOHmg/g) of Compound 1 and Compound 4 and 12.0 g of AA were reacted in benzene at 90°C for about 10

hours while adding thereto 1.5 g of PTS. Thereafter, the reaction solution was neutralized with an aqueous NaOH solution and then subjected to water washing and dehydration, as a result, a colorless viscous liquid was obtained. It was found from  $^1\text{H}$ -NMR and  $^{13}\text{C}$ -NMR that Compound 1, Compound 4 and AA were reacted at 1:1:3 to produce a mixture of Compound 5 and Compound 6.

The weight average molecular weight of this compound, determined by GPC, was 600 and the viscosity at 25°C was 70 mPa·s.

[0107]

[Chem. 21]

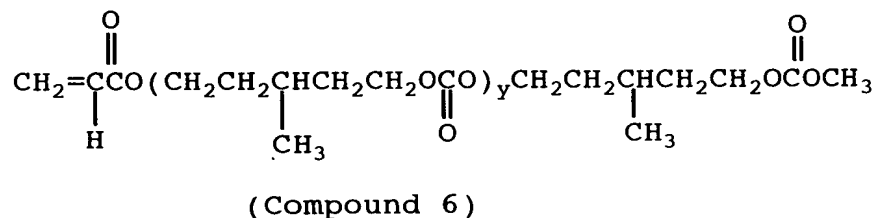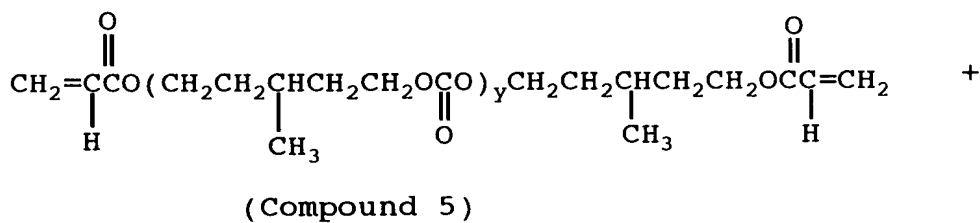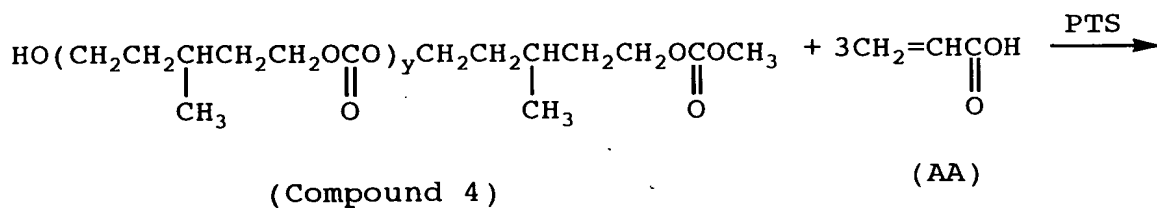

[0108]

Example 4: synthesis of polymerizable compound mixture  
(mixture of Compound 2 and Compound 7)

A mixture of Compound 1 and Compound 4 (1:1 by mol) and MI (produced by Showa Denko K.K.) were reacted according to the reaction formula shown below and a polymerizable compound (a mixture of Compound 2 and Compound 7) was obtained through the following procedure.

[0109]


To speak specifically, 50.0 g of a dehydrated 1:1 (by mol) mixture of Compound 1 and Compound 4 and 25.0 g of MI were reacted in dry air at 50°C for about 5 hours while adding thereto 0.08 g of dibutyltin dilaurate, as a result, a colorless viscous liquid was obtained.

It was found from <sup>1</sup>H-NMR and <sup>13</sup>C-NMR that Compound 1, Compound 4 and MI were reacted at 1:1:3 to produce a mixture of Compound 2 and Compound 7.


The weight average molecular weight of this compound, determined by GPC, was 700 and the viscosity at 25°C was 360 mPa·s.

[0110]


[Chem. 22]




(Compound 1)




(Compound 4)



(M1)

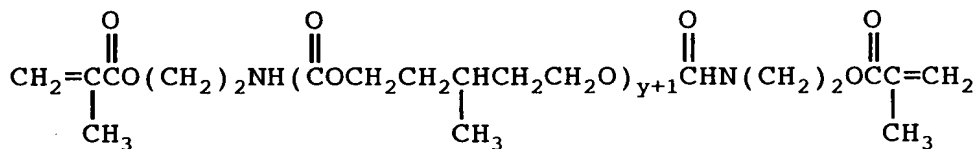

(Compound 2)

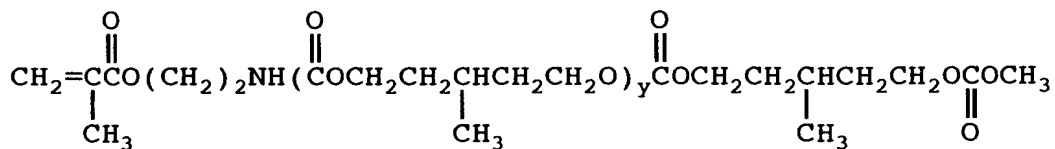

(Compound 7)

[0111]

Example 5: preparation of Polymerizable Composition A

1.0 g of Compound 2 synthesized in Example 1, 7.0 g of diethyl carbonate (DEC), 2.0 g of ethylene carbonate (EC), 1.0 g of  $\text{LiPF}_6$ , 40 mg of 2,4-diphenyl-4-methyl-1-pentene



(NOFMER MSD, a trade name, produced by NOF Corp.) as a polymerization retarder and 50 mg of t-hexyl peroxyvalate (PERHEXYL PV, a trade name, produced by NOF Corp.) as a thermopolymerization initiator were thoroughly mixed in an argon atmosphere to obtain Polymerizable Composition A for solid polymer electrolyte. This composition had an initial viscosity of 5.8 mPa·s (at 25°C). When 1 g of this polymerizable composition was heated at 60°C for 60 minutes in an argon atmosphere, the composition was cured and a solid polymer electrolyte resultant from the polymerization of Compound 2 was obtained. This cured product had a residual double bond of its detection limit in the infrared spectrum and an ionic conductivity of 4.7 mS/cm (at 25°C).

[0112]

Also, when 1 g of the thus-prepared polymerizable composition was left standing at 25°C in an argon atmosphere, the viscosity abruptly elevated after 15 hours and the composition as a whole lost fluidity and solidified.

[0113]

Example 6: preparation of Polymerizable Composition B

Polymerizable Composition B for solid polymer electrolyte was obtained in the same manner as in Example 5 except that 1.0 g of Compound 3 synthesized in Example 2 was used in place of 1.0 g of Compound 2 and the amount of polymerization retarder NOFMER MSD (produced by NOF Corp.)

was changed from 40 mg to 10 mg. This composition had an initial viscosity of 4.7 mPa·s (at 25°C). When 1 g of this polymerizable composition was heated at 80°C for 60 minutes in an argon atmosphere, the composition was cured and a solid polymer electrolyte resultant from the polymerization of Compound 3 was obtained. This cured product had a residual double bond of its detection limit in the infrared spectrum and an ionic conductivity of 3.8 mS/cm (at 25°C).

[0114]

Also, when 1 g of the thus-prepared polymerizable composition was left standing at 25°C in an argon atmosphere, the viscosity abruptly elevated after 25 hours and the composition as a whole lost fluidity and solidified.

[0115]

#### Example 7: preparation of Polymerizable Composition C

Polymerizable Composition C for solid polymer electrolyte was obtained in the same manner as in Example 5 except that 1.0 g of a mixture of Compound 5 and Compound 6 synthesized in Example 3 was used in place of 1.0 g of Compound 2 and the amount of polymerization retarder NOFMER MSD (produced by NOF Corp.) was changed from 40 mg to 10 mg. This composition had an initial viscosity of 4.2 mPa·s (at 25°C). When 1 g of this polymerizable composition was heated at 80°C for 60 minutes in an argon atmosphere, the composition was cured and a solid polymer electrolyte

resultant from the copolymerization of Compound 5 and Compound 6 was obtained. This cured product had a residual double bond of its detection limit in the infrared spectrum and an ionic conductivity of 4.0 mS/cm (at 25°C).

[0116]

Also, when 1 g of the thus-prepared polymerizable composition was left standing at 25°C in an argon atmosphere, the viscosity abruptly elevated after 30 hours and the composition as a whole lost fluidity and solidified.

[0117]

Example 8: preparation of Polymerizable Composition D

Polymerizable Composition D for solid polymer electrolyte was obtained in the same manner as in Example 5 except that 1.0 g of a mixture of Compound 2 and Compound 7 synthesized in Example 4 was used in place of 1.0 g of Compound 2. This composition had an initial viscosity of 4.8 mPa·s (at 25°C). When 1 g of this polymerizable composition was heated at 60°C for 60 minutes in an argon atmosphere, the composition was cured and a solid polymer electrolyte resultant from the copolymerization of Compound 2 and Compound 7 was obtained. This cured product had a residual double bond of its detection limit in the infrared spectrum and an ionic conductivity of 4.8 mS/cm (at 25°C).

[0118]

Also, when 1 g of the thus-prepared polymerizable

composition was left standing at 25°C in an argon atmosphere, the viscosity abruptly elevated after 15 hours and the composition as a whole lost fluidity and solidified.


[0119]

Example 9: synthesis of polymerizable compound (Compound 8)

Carbonate-diol (produced by Nippon Polyurethane, weight average molecular weight: 500) (Compound 8) and MI (produced by Showa Denko K.K.) were reacted according to the reaction formula shown below and a polymerizable compound (Compound 9) was obtained through the following procedure.


[0120]

[Chem. 23]



(Compound 8)

(MI)

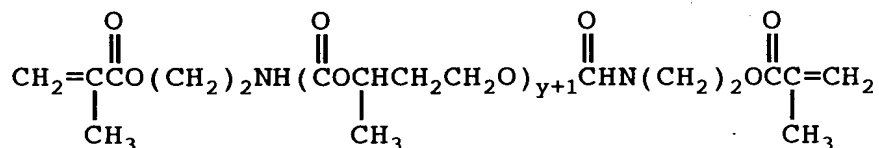

(Compound 9)

[0121]

To speak specifically, 50.0 g of dehydrated Compound 8 (weight average molecular weight: 500, hydroxyl group value: 224 KOHmg/g, water content: 30 ppm) and 32.0 g of MI

were reacted in dry air at 50°C for about 5 hours while adding thereto 0.1 g of dibutyltin dilaurate, as a result, a colorless viscous liquid was obtained. It was found from <sup>1</sup>H-NMR and <sup>13</sup>C-NMR that Compound 8 and MI were reacted at 1:2 and since the absorption of isocyanate group of Compound 8 disappeared from the infrared absorption spectrum, a urethane bond was produced, revealing the production of Compound 9. The weight average molecular weight of Compound 2, determined by GPC (gel permeation chromatography), was 800 and the viscosity at 25°C was 3,000 mPa·s.



[0122]

Example 10: synthesis of polymerizable compound (Compound 10)

Compound 8 and commercially available AA were reacted according to the reaction formula shown below and a polymerizable compound (Compound 10) was obtained through the following procedure.

[0123]

[Chem. 24]

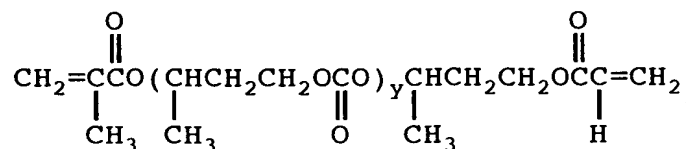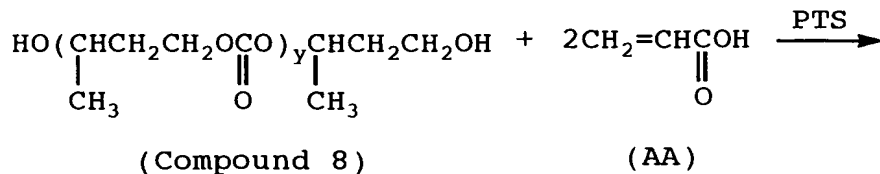

(Compound 10)

[0124]

To speak specifically, 50.0 g of Compound 8 and 17.0 g of AA were reacted in benzene at 90°C for about 10 hours while adding thereto 2.2 g of PTS. Thereafter, the reaction solution was extracted with chloroform and dehydrated, as a result, a colorless viscous liquid was obtained. It was found from <sup>1</sup>H-NMR and <sup>13</sup>C-NMR that Compound 8 and AA were reacted at 1:2 to produce Compound 10.

The weight average molecular weight of this compound, determined by GPC, was 650 and the viscosity at 25°C was 150 mPa·s.

[0125]

Example 11: preparation of Polymerizable Composition E

Polymerizable Composition E for solid polymer electrolyte was obtained in the same manner as in Example 5

except that 1.0 g of Compound 9 synthesized in Example 9 was used in place of 1.0 g of Compound 2. This composition had an initial viscosity of 5.1 mPa·s (at 25°C). When 1 g of this polymerizable composition was heated at 60°C for 60 minutes in an argon atmosphere, the composition was cured and a solid polymer electrolyte resultant from the polymerization of Compound 9 was obtained. This cured product had a residual double bond of its detection limit in the infrared spectrum and an ionic conductivity of 3.8 mS/cm (at 25°C).

Also, when 1 g of the thus-prepared polymerizable composition was left standing at 25°C in an argon atmosphere, the viscosity abruptly elevated after 25 hours and the composition as a whole lost fluidity and solidified.

[0126]

#### Example 12: preparation of Polymerizable Composition F

Polymerizable Composition F for solid polymer electrolyte was obtained in the same manner as in Example 5 except that 1.0 g of Compound 10 synthesized in Example 10 was used in place of 1.0 g of Compound 2 and the amount of polymerization retarder NOFMER MSD (NOF Corp.) was changed from 40 mg to 5 mg. This composition had an initial viscosity of 4.4 mPa·s (at 25°C). When 1 g of this polymerizable composition was heated at 80°C for 60 minutes in an argon atmosphere, the composition was cured and a

solid polymer electrolyte resultant from the polymerization of Compound 10 was obtained. This cured product had a residual double bond of its detection limit in the infrared spectrum and an ionic conductivity of 3.7 mS/cm (at 25°C).

Also, when 1 g of the thus-prepared polymerizable composition was left standing at 25°C in an argon atmosphere, the viscosity abruptly elevated after 30 hours and the composition as a whole lost fluidity and solidified.

[0127]


Comparative Example 1: synthesis of polymerizable compound (Compound 12)

Carbonate-diol (produced by Nippon Polyurethane K.K., weight average molecular weight: 500) (Compound 11) and MI (produced by Showa Denko K.K.) were reacted according to the reaction formula shown below and a polymerizable compound (Compound 12) was obtained through the following procedure.




[0128]


[Chem. 25]



(Compound 11)



(MI)

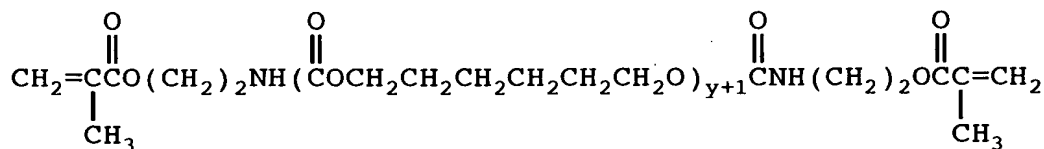

(Compound 12)

[0129]

To speak specifically, 50.0 g of dehydrated Compound 11 (weight average molecular weight: 500, hydroxyl group value: 224 KOHmg/g, water content: 30 ppm) and 32.0 g of MI were reacted in dry air at 50°C for about 5 hours while adding thereto 0.1 g of dibutyltin dilaurate, as a result, a colorless viscous liquid was obtained. It was found from <sup>1</sup>H-NMR and <sup>13</sup>C-NMR that Compound 11 and MI were reacted at 1:2 and since the absorption of isocyanate group of Compound 11 from the infrared absorption spectrum, a urethane bond was produced, revealing the production of Compound 12. The weight average molecular weight of Compound 12, determined by GPC, was 800. This compound was

solid at 25°C and liquefied at 45°C and the viscosity thereof was 2,000 mPa·s.


[0130]

Comparative Example 2: synthesis of polymerizable compound (Compound 13)

Compound 11 and commercially available acrylic acid (AA) were reacted according to the reaction formula shown below and a polymerizable compound (Compound 13) was obtained through the following procedure.

[0131]

[Chem. 26]

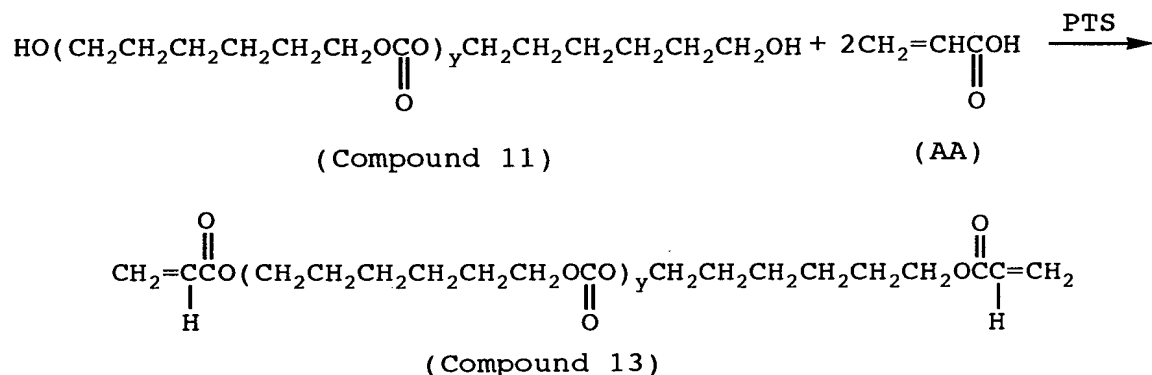

[0132]

To speak specifically, 50.0 g of Compound 11 and 17.0 g of AA were reacted in benzene at 90°C for about 10 hours while adding thereto 2.2 g of PTS. Thereafter, the reaction solution was washed with an aqueous NaOH solution and then dehydrated, as a result, a colorless viscous liquid was obtained. It was found from <sup>1</sup>H-NMR and <sup>13</sup>C-NMR

that Compound 1 and AA were reacted at 1:2 to produce Compound 13.

The weight average molecular weight of this compound, determined by GPC, was 650. This compound was solid at 25°C and liquefied at 45°C and the viscosity thereof was 220 mPa·s.

[0133]

Comparative Example 3: synthesis of polymerizable compound (Compound 15)

Carbonate-diol (produced by Nippon Polyurethane K.K., weight average molecular weight: 2,000) (Compound 14) and MI (produced by Showa Denko K.K.) were reacted according to the reaction formula shown below and a polymerizable compound (Compound 15) was obtained through the following procedure.


[0134]

To speak specifically, 50.0 g of dehydrated Compound 14 (weight average molecular weight: 2,000, hydroxyl group value: 56 KOHmg/g, water content: 30 ppm) and 8.0 g of MI were reacted in dry air at 50°C for about 5 hours while adding thereto 0.02 g of dibutyltin dilaurate, as a result, a colorless viscous liquid was obtained. It was found from <sup>1</sup>H-NMR and <sup>13</sup>C-NMR that Compound 14 and MI were reacted at 1:2 and since the absorption of isocyanate group of Compound 14 disappeared from the infrared spectrum, a

urethane bond was produced, revealing the production of Compound 15. The weight average molecular weight of Compound 2, determined by GPC, was 2,300 and the viscosity at 25°C was 100,000 mPa·s.

[0135]

[Chem. 27]

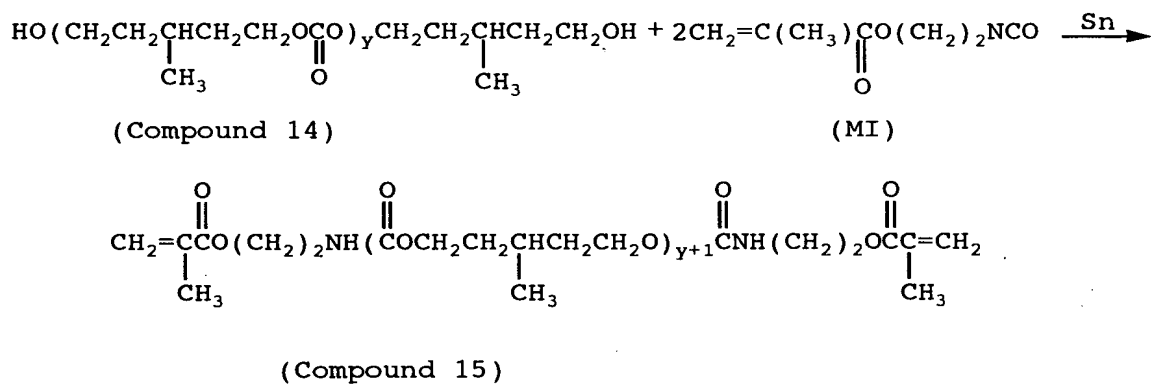



[0136]

Comparative Example 4: synthesis of polymerizable compound (Compound 16)

Compound 14 and commercially available AA were reacted according to the reaction formula shown below and a polymerizable compound (Compound 16) was obtained through the following procedure.

[0137]

[Chem. 28]

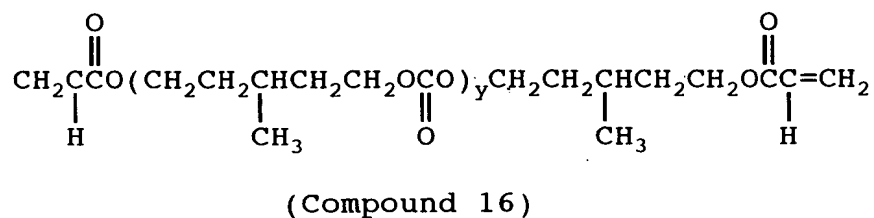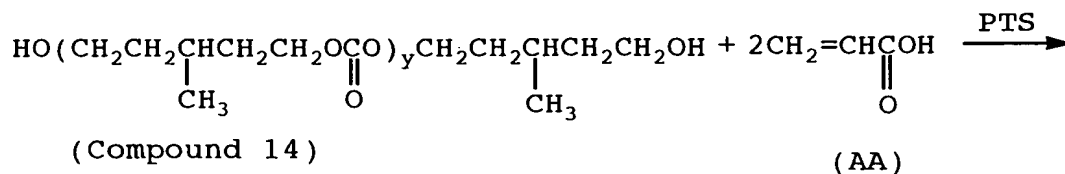

[0138]

To speak specifically, 50.0 g of Compound 14 and 4.0 g of AA were reacted in benzene at 90°C for about 5 hours while adding thereto 0.5 g of PTS. Thereafter, the reaction solution was extracted with chloroform and dehydrated, as a result, a colorless viscous liquid was obtained. It was found from <sup>1</sup>H-NMR and <sup>13</sup>C-NMR that Compound 14 and AA were reacted at 1:2 to produce Compound 16.

The weight average molecular weight of this compound, determined by GPC, was 2,100 and the viscosity at 25°C was 2,000 mPa·s.

[0139]

Comparative Example 5: preparation of Polymerizable Composition G

Polymerizable Composition G for solid polymer electrolyte was obtained in the same manner as in Example 5

except that 1.0 g of Compound 12 synthesized in Comparative Example 1 was used in place of 1.0 g of Compound 2. This composition had an initial viscosity of 6.7 mPa·s (at 25°C). When 1 g of this polymerizable composition was heated at 60°C for 60 minutes in an argon atmosphere, the composition was cured and a solid polymer electrolyte resultant from the polymerization of Compound 12 was obtained. This cured product had a residual double bond of its detection limit in the infrared spectrum and an ionic conductivity of 4.2 mS/cm (at 25°C).

Also, when 1 g of the thus-prepared polymerizable composition was left standing at 25°C in an argon atmosphere, the viscosity abruptly elevated after 12 hours and the composition as a whole lost fluidity and solidified.

[0140]

Comparative Example 6: preparation of Polymerizable Composition H

Polymerizable Composition H for solid polymer electrolyte was obtained in the same manner as in Example 5 except that 1.0 g of Compound 13 synthesized in Comparative Example 2 was used in place of 1.0 g of Compound 2 and the amount of polymerization retarder NOFMER MSD (NOF Corp.) was changed from 40 mg to 5 mg. This composition had an initial viscosity of 4.4 mPa·s (at 25°C). When 1 g of this polymerizable composition was heated at 80°C for 60 minutes

in an argon atmosphere, the composition was cured and a solid polymer electrolyte resultant from the polymerization of Compound 13 was obtained. This cured product had a residual double bond of its detection limit in the infrared spectrum and an ionic conductivity of 3.4 mS/cm (at 25°C).

Also, when 1 g of the thus-prepared polymerizable composition was left standing at 25°C in an argon atmosphere, the viscosity abruptly elevated after 30 hours and the composition as a whole lost fluidity and solidified.

[0141]

Comparative Example 7: preparation of Polymerizable Composition I

Polymerizable Composition I for solid polymer electrolyte was obtained in the same manner as in Example 5 except that 1.0 g of Compound 15 synthesized in Comparative Example 3 was used in place of 1.0 g of Compound 2. This composition had an initial viscosity of 7.8 mPa·s (at 25°C). When 1 g of this polymerizable composition was heated at 60°C for 60 minutes in an argon atmosphere, the composition was cured and a solid polymer electrolyte resultant from the polymerization of Compound 15 was obtained. This cured product had a residual double bond of its detection limit in the infrared spectrum and an ionic conductivity of 4.3 mS/cm (at 25°C).

Also, when 1 g of the thus-prepared polymerizable

composition was left standing at 25°C in an argon atmosphere, the viscosity abruptly elevated after 30 hours and the composition as a whole lost fluidity and solidified.

[0142]

Comparative Example 8: preparation of Polymerizable Composition J

Polymerizable Composition J for solid polymer electrolyte was obtained in the same manner as in Example 5 except that 1.0 g of Compound 16 synthesized in Comparative Example 4 was used in place of 1.0 g of Compound 2 and the amount of polymerization retarder NOFMER MSD (NOF Corp.) was changed from 40 mg to 5 mg. This composition had an initial viscosity of 5.7 mPa·s (at 25°C). When 1 g of this polymerizable composition was heated at 80°C for 60 minutes in an argon atmosphere, the composition was cured and a solid polymer electrolyte resultant from the polymerization of Compound 16 was obtained. This cured product had a residual double bond of its detection limit in the infrared spectrum and an ionic conductivity of 3.2 mS/cm (at 25°C).

Also, when 1 g of the thus-prepared polymerizable composition was left standing at 25°C in an argon atmosphere, the viscosity abruptly elevated after 30 hours and the composition as a whole lost fluidity and solidified.



[0143]

Example 13: production of lithium cobaltate positive electrode

11 g of  $\text{Li}_2\text{CO}_3$  and 24 g of  $\text{Co}_3\text{O}_4$  were thoroughly mixed and the mixture was heated at  $800^\circ\text{C}$  for 24 hours in an oxygen atmosphere and pulverized to obtain  $\text{LiCoO}_2$  powder. This  $\text{LiCoO}_2$  powder, acetylene black and polyvinylidene fluoride were mixed at a weight ratio of 8:1:1 and thereto, an excess N-methylpyrrolidone solution was added to obtain a gel composition.

This composition was coated on an aluminum foil of about  $50\text{ }\mu\text{m}$  and formed under pressure to a thickness of about  $75\text{ }\mu\text{m}$  to obtain a lithium cobaltate positive electrode sheet. This sheet was cut into a 36 mm square and used as the positive electrode for battery.

[0144]

Example 14: production of graphite negative electrode

To a 8.6:0.4:1.0 (by weight) mixture of MCMB graphite (produced by Osaka Gas Co., Ltd.), vapor grown graphite fiber (produced by Showa Denko K.K., average fiber diameter:  $0.3\text{ }\mu\text{m}$ , average fiber length:  $2.0\text{ }\mu\text{m}$ , a product heat-treated at  $2,700^\circ\text{C}$ ) and polyvinylidene fluoride, an excess N-methylpyrrolidone solution was added to obtain a gel composition. This composition was coated on a copper foil of about  $50\text{ }\mu\text{m}$  and formed under pressure to a

thickness of about 85  $\mu\text{m}$  to obtain a graphite negative electrode sheet. This sheet was cut into a 40 mm square and used as the negative electrode for battery.

[0145]

Example 15: production of solid Li ion secondary battery

Within a glove box in an argon atmosphere, a sheet-like graphite negative electrode similar to the sheet produced in Example 14, a sheet-like lithium cobaltate positive electrode similar to the sheet produced in Example 13 and a 42 mm-square polyolefin microporous film were left standing in Polymerizable Composition A prepared in Example 5 and impregnated with the composition. Thereafter, the positive electrode and the negative electrode were laminated through the microporous film, such that the microporous film slightly protruded from the edges (four sides) of the positive and negative electrodes. These were placed in a bag (armor body) made of a PP/Al/PET three-layer laminate and after heat-fusing and thereby sealing the bag while applying a pressure from both surfaces using 1.1 mm-thick glass plates, the polymerizable composition was cured by heating it at 60°C for 120 minutes to obtain a solid battery in which solid polymer electrolyte is compounded in electrodes and separator.

[0146]

This battery was charged and discharged with a working

voltage of 2.75 to 4.2 V and an electric current of 7 mA at 25°C and -20°C, as a result, the maximum discharge capacity was 32.5 mAh and 18.8 mAh, respectively. At this time, the charge-discharge coulombic efficiency was almost 100%.

The battery was repeatedly charged and discharged at 25°C, a working voltage of 2.75 to 4.2 V, a charge current of 7 mA and a discharge current of 35 mA, as a result, the maximum discharge capacity was 30.5 mAh and even after working in excess of 300 cycles, the capacity was 70% or more of the initial capacity and not extremely reduced.

[0147]

Examples 16 to 20: production of solid Li ion secondary battery

Solid batteries in which solid polymer electrolyte within electrodes and separator was compounded were obtained in the same manner as in Example 15 except that Polymerizable Composition B, C, D, E or F prepared in Example 6, 7, 8, 11 or 12, respectively, was used in place of Polymerizable Composition A used in Example 15. However, the time period of allowing the polymerizable composition to impregnate into positive and negative electrodes and separator was selected to ensure the impregnation according to the viscosity of each composition.

These batteries each was charged and discharged with a working voltage of 2.75 to 4.2 V and an electric current of

7 mA at 25°C and -20°C and found to have maximum discharge capacity and charge-discharge coulombic efficiency shown in Table 1.

Also, each battery was repeatedly charged and discharged at 25°C, a working voltage of 2.75 to 4.2 V, a charge current of 7 mA and a discharge current of 35 mA, and found to have maximum discharge capacity and capacity maintenance percentage (ratio to the initial capacity) after 300 cycles shown in Table 1.

[0148]

Comparative Examples 9 to 12: production of solid Li ion secondary battery

Solid batteries in which the polymerizable composition was cured and thereby, solid polymer electrolyte within electrodes and separator was compounded were obtained in the same manner as in Example 15 except that Polymerizable Composition G, H, I or J prepared in Comparative Example 5, 6, 7 or 8, respectively, was used in place of Polymerizable Composition A used in Example 15. However, the time period of allowing the polymerizable composition to impregnate into positive and negative electrodes and separator was selected to ensure the impregnation according to the viscosity of each composition.

These batteries each was charged and discharged with a working voltage of 2.75 to 4.2 V and an electric current of

7 mA at 25°C and -20°C and found to have maximum discharge capacity shown in Table 2.

Also, each battery was repeatedly charged and discharged at 25°C, a working voltage of 2.75 to 4.2 V, a charge current of 7 mA and a discharge current of 35 mA, and found to have maximum discharge capacity and capacity maintenance percentage (ratio to the initial capacity) after 300 cycles shown in Table 2.

[0149]

[Table 1]

Table 1: Performance of Solid Li Ion Secondary Battery

| Example | Impregnation Time (hr) | Maximum Discharge Capacity at 7 mA (mAh) |       | Capacity (mAh) at 25°C·35 mA |                           |
|---------|------------------------|--|-------|------------------------------|---------------------------|
|         |                        | 25°C                                     | -20°C | Maximum Discharge Capacity   | Capacity After 300 Cycles |
| 15      | 6                      | 32.5                                     | 16.5  | 30.5                         | 21.4(70%)                 |
| 16      | 4                      | 32.5                                     | 18.0  | 30.0                         | 22.5(75%)                 |
| 17      | 3                      | 32.5                                     | 18.5  | 30.0                         | 21.0(70%)                 |
| 18      | 5                      | 32.5                                     | 17.0  | 31.0                         | 22.3(72%)                 |
| 19      | 5                      | 32.5                                     | 17.0  | 31.0                         | 21.0(68%)                 |
| 20      | 4                      | 32.5                                     | 18.0  | 29.5                         | 22.1(75%)                 |

[0150]

[Table 2]

Table 2: Performance of Solid Li Ion Secondary Battery

| Comparative Example | Impregnation Time (hr) | Maximum Discharge Capacity at 7 mA (mAh) |       | Capacity (mAh) at 25°C · 35 mA |                           |
|---------------------|------------------------|--|-------|--------------------------------|---------------------------|
|                     |                        | 25°C                                     | -20°C | Maximum Discharge Capacity     | Capacity After 300 Cycles |
| 9                   | 10                     | 30.0                                     | 12.0  | 29.5                           | 19.2(65%)                 |
| 10                  | 4                      | 32.5                                     | 14.0  | 26.0                           | 18.2(70%)                 |
| 11                  | 15                     | 28.0                                     | 12.5  | 27.0                           | 16.2(60%)                 |
| 12                  | 5                      | 30.0                                     | 13.5  | 25.5                           | 15.3(60%)                 |

[0151]

Example 21: preparation of Polymerizable Composition K

1.0 g of a mixture (1:1 by mol) of Compound 5 and Compound 6 synthesized in Example 3, 9.0 g of propylene carbonate (PC), 2.0 g of triethylmethylammonium tetrafluoroborate (TEMABF<sub>4</sub>), 20 mg of polymerization retarder NOFMER MSD (produced by NOF Corp.) and 50 mg of thermopolymerization initiator PERHEXYL PV (produced by NOF Corp.) were thoroughly mixed in an argon atmosphere to obtain Polymerizable Composition K for solid polymer electrolyte. This composition had an initial viscosity of 6.3 mPa·s (at 25°C). When 1 g of this polymerizable composition was heated at 80°C for 60 minutes in an argon atmosphere, the composition was cured and a solid polymer

electrolyte resultant from the copolymerization of Compound 5 and Compound 6 was obtained. This cured product had a residual double bond of its detection limit in the infrared spectrum and an ionic conductivity of 14.1 mS/cm (at 25°C).

Also, when 1 g of the thus-prepared polymerizable composition was left standing at 25°C in an argon atmosphere, the viscosity abruptly elevated after 20 hours and the composition as a whole lost fluidity and solidified.

[0152]

#### Example 22: Production of Active Carbon Electrode

An excess N-methylpyrrolidone solution was added to a 8.6:0.4:1.0 (by weight) mixture of steam reactivation active carbon (specific surface area: 2,230 m<sup>2</sup>/g, average particle size: 7 μm, pore volume: 0.7 ml/g) as a phenol resin calcined product, vapor grown graphite fiber (produced by Showa Denko K.K., average fiber diameter: 0.3 μm, average fiber length: 2.0 μm, a product heat-treated at 2,700°C) and polyvinylidene fluoride, to obtain a gel composition. This composition was coated on an aluminum foil of about 25 μm and formed under pressure to a thickness of about 150 μm to obtain an active carbon electrode sheet. This sheet was cut into a 10 mm square and vacuum dried at 100°C for 10 hours to obtain an active carbon electrode (230.0 mg) for electric double-layer capacitor.

[0153]

Example 23: production of solid electric double-layer capacitor

Within a glove box in an argon atmosphere, two sheets of active carbon electrodes (230.0 mg, 40-mm square) produced in Example 22 and a Teflon-made microporous film separator (42 mm square, 25  $\mu$ m, produced by Mitsui FLOROCHEMICAL) were left standing in Polymerizable Composition K prepared in Example 21 at room temperature for 8 hours and impregnated with the composition. Thereafter, these two sheets of electrodes were laminated with an interposition of microporous film separator, such that the microporous film slightly protruded from the edges (four sides) of two sheets of electrodes. These were placed in a bag (armor body) made of a PP/Al/PET three-layer laminate and after heat-fusing and thereby sealing the bag while applying a pressure from both surfaces using 1.1 mm-thick glass plates, the polymerizable composition was cured by heating it at 60°C for 120 minutes to obtain a solid electric double-layer capacitor, where the solid polymer electrolyte was compounded in electrodes and separator.

This capacitor was charged and discharged at 25°C and -20°C, a working voltage of 0 to 2.5 V and an electric current of 7 mA, as a result, the maximum capacitance was 9.1 F and 6.6 F, respectively. Furthermore, the capacitor



was charged and discharged at 25°C and 14 mA, as a result, the maximum capacitance was 8.9 F. Thereafter, the charge and discharge were repeated 100 times but the capacitance was scarcely changed.

[0154]

Example 24: preparation of Polymerizable Composition K

1.0 g of a mixture (1:1 by mol) of Compound 5 and Compound 6 synthesized in Example 3, 9.0 g of propylene carbonate (PC), 1.0 g of  $\text{LiBF}_4$ , 5 mg of polymerization retarder NOFMER MSD (produced by NOF Corp.) and 50 mg of thermopolymerization initiator PERHEXYL PV (produced by NOF Corp.) were thoroughly mixed in an argon atmosphere to obtain Polymerizable Composition L for solid polymer electrolyte. This composition had an initial viscosity of 4.5 mPa·s (at 25°C). When 1 g of this polymerizable composition was heated at 80°C for 60 minutes in an argon atmosphere, the composition was cured and a solid polymer electrolyte resultant from the copolymerization of Compound 5 and Compound 6 was obtained. This cured product had a residual double bond of its detection limit in the infrared spectrum and an ionic conductivity of 5.0 mS/cm (at 25°C).

Also, when 1 g of the thus-prepared polymerizable composition was left standing at 25°C in an argon atmosphere, the viscosity abruptly elevated after 25 hours and the composition as a whole lost fluidity and solidified.

[0155]

Example 25: manufacture of  $\text{WO}_3$ -made EC electrode

On an electrode comprising an ITO glass (produced by Matsuzaki Shinku K.K.) cut into  $1.2 \times 1.2$  cm with the edges being covered to have an ITO exposed area of  $1 \times 1$  cm,  $\text{WO}_3$  was vacuum deposited using tantalum boat member by a resistance heating method at  $10^{-5}$  to  $10^{-6}$  Torr ( $1.33 \times 10^{-3}$  to  $1.33 \times 10^{-4}$  Pa) to obtain  $\text{WO}_3$  electrode. The obtained  $\text{WO}_3$  film had a thickness of about 1,000 Å ( $1 \times 10^{-7}$  m) and a density of about 5 g/cm<sup>3</sup>.

[0156]

Example 26: manufacture of polyaniline (PAN)-made EC electrode

On an electrode comprising ITO glass (produced by Matsuzaki Shinku K.K.) cut into  $1.2 \times 1.2$  cm, potential scanning was repeated at a scanning speed of 0.2 V/sec in the range from -0.2 to 0.8 V vs. SCE using an aqueous 1M hydrochloric acid solution containing 0.5 M aniline as the electrolytic solution and an ITO glass of  $2 \times 2$  cm as the counter electrode, whereby a doped green electrolytically polymerized PAN film of about 5,000 Å was manufactured. This film was thoroughly washed with aqueous ammonia and distilled water, reduced with hydrazine and vacuum dried at 100°C for about 3 hours to obtain an undoped white PAN electrode.

[0157]

Example 27: manufacture of electrochromic device (ECD)

Within a glove box in an argon atmosphere, the edge part within about 1 mm around of the PAn electrode (1.2 cm-square) produced in Example 26 was coated with a polyimide film spacer. Thereafter, the polymerizable composition prepared in Example 24 was coated on the PAn electrode and WO<sub>3</sub> electrode produced in Example 25 was stacked thereon and heated at 60°C for 120 minutes. By sealing the edge part with an epoxy resin, ECD shown in Fig. 3 was manufactured. This ECD was driven with an injected electricity of 6 mC/cm<sup>2</sup> at a working voltage of -2 to 2 V, as a result, electrochromism of deep bleu/pale blue was exhibited and the response seed was about 100 msec. Even when the driving was repeated 200 times under these conditions, the color tone and response speed were not changed.

[0158]

[Effects of the Invention]

The highly ion conductive solid polymer electrolyte comprising a polymer having a carbonate group as a main component and an electrolyte salt of the present invention has high ionic conductivity, excellent electrochemical stability and good durability. By introducing a branched chain, excellent processability and compounding property with other materials are ensured in use as an

electrochemical device. In particular, when the carbonate-based solid polymer electrolyte of the present invention is obtained by polymerizing a low molecular weight polymerizable compound having a branched carbonate structure, the compounding with various materials can be performed before the polymerization and the processability and compounding property are more improved.

[0159]

The battery, electric double-layer capacitor and ECD using the solid polymer electrolyte of the present invention are free of any fear for liquid leakage and favored with excellent reliability and safety over a long period of time and also with wide freeness in the shape such as thin type.

[0160]

The battery of the present invention uses the above-described solid polymer electrolyte and therefore, can be easily formed into a film and also easily and simply compounded with respective elements such as positive electrode and/or negative electrode and/or separator, so that the battery can work with high capacity and high current and ensure long life and high reliability.

[0161]

The battery of the present invention can work with high capacity and high current as a solid battery or can

ensure good cycle property and excellent safety and reliability, so that the battery can be used as a power source for electrical products, such as main power source or backup power source of portable appliances, or as a large-sized power source for electric cars or road leveling. Furthermore, the battery can be easily formed into a thin film and therefore, can be used as a paper battery of identification card or the like.

[0162]

The electric double-layer capacitor of the present invention uses the above-described solid polymer electrolyte, so that the capacitor can have high output voltage, large takeout current, good processability, long life and excellent reliability.

[0163]

Furthermore, the electric double-layer capacitor of the present invention is a solid electric double-layer capacitor capable of working with high voltage, high capacitance and high current and ensuring good cycle property, excellent safety and high reliability as compared with conventional solid electric double-layer capacitors, so that the capacitor can be used not only as a backup power source but also as a power source for various electrical products by using it in combination with a compact battery. In addition, the electric double-layer

capacitor of the present invention has excellent processability such as formation into thin film and therefore, can apply to uses other than those of conventional solid-state electric double-layer capacitors.

[0164]

[BRIEF DESCRIPTION OF THE DRAWINGS]

[Fig. 1]

Fig. 1 is a schematic cross-sectional view showing a thin battery according to one embodiment of the battery of the present invention.

[Fig. 2]

Fig. 2 is a schematic cross-sectional view showing one embodiment of the solid electric double-layer capacitor of the present invention.

[Fig. 3]

Fig. 3 is a schematic cross-sectional view showing one embodiment of the solid thin ECD of the present invention.

[Description of Numerical References]

- 1 positive electrode
- 2 porous separator
- 3 negative electrode
- 4 collector
- 5 heat fusion polymer film
- 6 device case
- 7 solid polymer electrolyte

- 8 polarizable electrode
- 9 porous separator
- 10 polarizable electrode
- 11 collector
- 12 heat fusion polymer film
- 13 device case
- 14 solid polymer electrolyte
- 15 transparent electrically conducting electrode
- 16 EC layer
- 17 solid polymer electrolyte
- 18 counter electrode
- 19 insulating film spacer
- 20 insulating resin sealant
- 21 lead wire

[NAME OF THE DOCUMENT] Abstract

[SUMMARY]

[PROBLEM TO BE SOLVED]

To provide a solid polymer electrolyte having high ionic conductivity and good stability; a polymerizable composition having low viscosity and excellent processability for obtaining the solid polymer electrolyte; a polymerizable compound having low viscosity and good polymerizability and stability for use in the polymerizable composition; primary and secondary batteries capable of working with high capacity and high current and ensuring long life, excellent safety free of liquid leakage, high reliability and production at a low cost; an electric double-layer capacitor ensuring high output voltage, large takeout current, good processability, long life, excellent safety free of liquid leakage, high reliability and production at a low cost; and an electrochromic device favored with high response speed, long life, excellent safety free of liquid leakage and high reliability and production at a low cost.

[MEANS TO SOLVE THE PROBLEM]

A solid polymer electrolyte mainly comprising a carbonate-based polymer having a high dielectric constant and a wide electrochemical stability range, in which a



branched chain is introduced into the carbonate-based polymer and which has excellent processability, good safety and high ionic conductivity.


A solid primary battery, a solid secondary battery, a solid electric double-layer capacitor and a solid electrochromic device using the solid polymer electrolyte.

[SELECTED DRAWING] None.


[Name of Document]

Drawing

[Fig. 1]

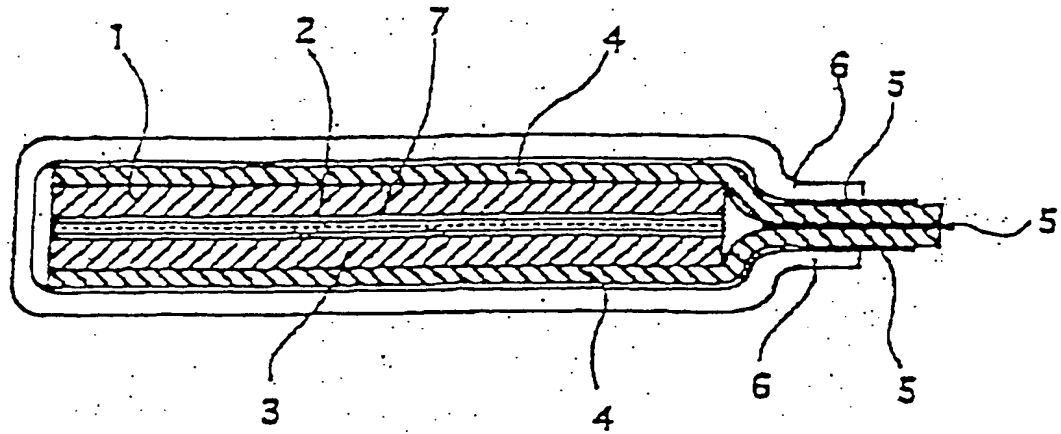

[Fig. 2]

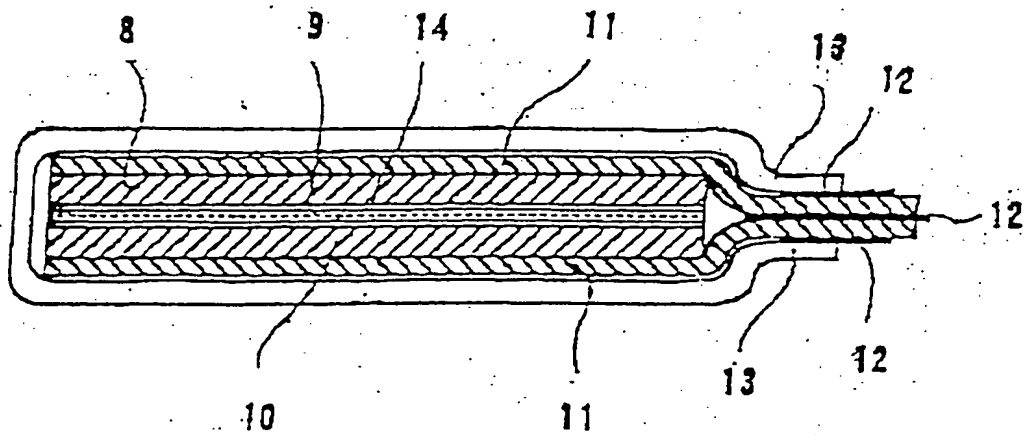

[Fig. 3]

